


Emergency Bulkhead

Innovation. Collaboration. Illumination.



Emergency



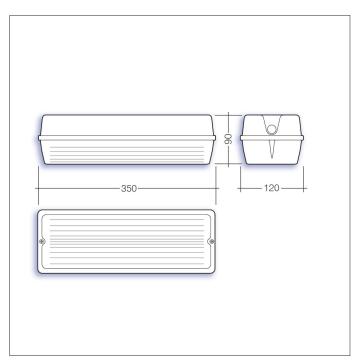

Key features

- IP65 suitable for external environments
- Impact rating of IKO6
- Efficacy of up to 100 lm/W
- Emergency BLF = 150lm
- Battery 1 x 3.6V 1.5Ah NiCd
- Light source: 16 x 4500K LEDs (CRI>80)
- Weight: 1.1 kg

Options

For self test emergency suffix

/ST

Part No.	Description	L	В	н
AX/M3	LED Maintained WHI/PRIS	350	120	90
AX/230	LED Mains Only WHI/PRIS	350	120	90
ULK	Universal Legend Kit			

For more information, please contact Sales@ldl.lighting

