



Felix Ported

Downlighter

Innovation.
Collaboration.
Illumination.



Indoor Lighting

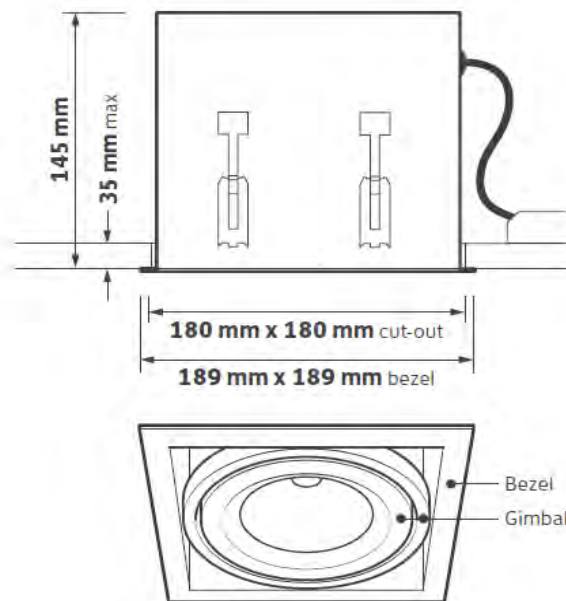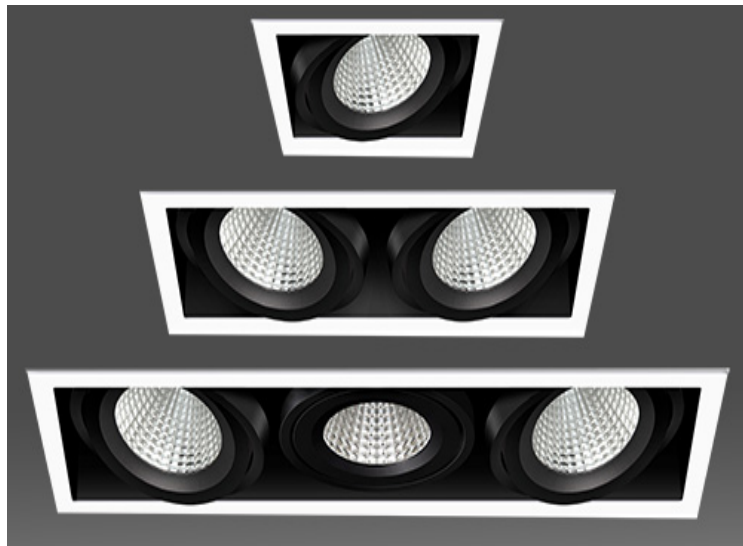


Options

For 25° multi-faceted reflector	/25
For 60° multi-faceted reflector	/60
For 40° specular reflector	/40
For 50° satin reflector	/50
For 3000K suffix	/3
For 4000K suffix	/4
For DALI dimmable suffix	/DIM
For 3hr emergency suffix	/EMR
For self-test suffix	/ST
For addressable emergency suffix	/EMP

i.e. **FEL/P/2375/4/ST =**

Felix Ported, 2375 lumens, 4000K, c/w Self-test Emergency.

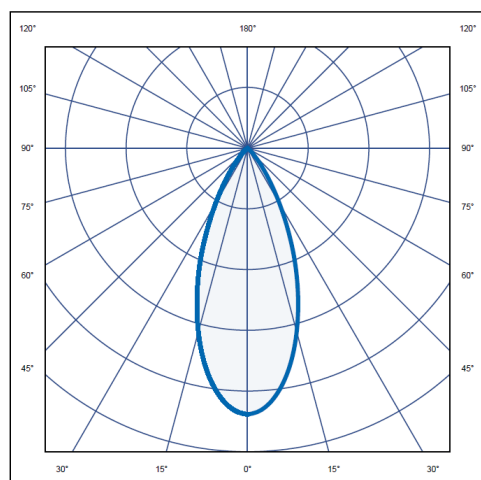

Part No. W Lm Lm/W

FEL/P1/1025/3	8	1025	128
FEL/P1/1075/4	8	1075	134
FEL/P1/1725/3	14	1725	123
FEL/P1/1800/4	14	1800	129
FEL/P1/2375/3	19	2375	125
FEL/P1/2450/4	19	2450	129
FEL/P1/3150/3	28	3150	113
FEL/P1/3275/4	28	3275	117

For more information, please contact Sales@ldl.lighting

P1, P2, P3 depending on how many heads are required.

Key features

- Fully adjustable LED framelight
- Efficacy of up to 134lm/W

