


Emergency

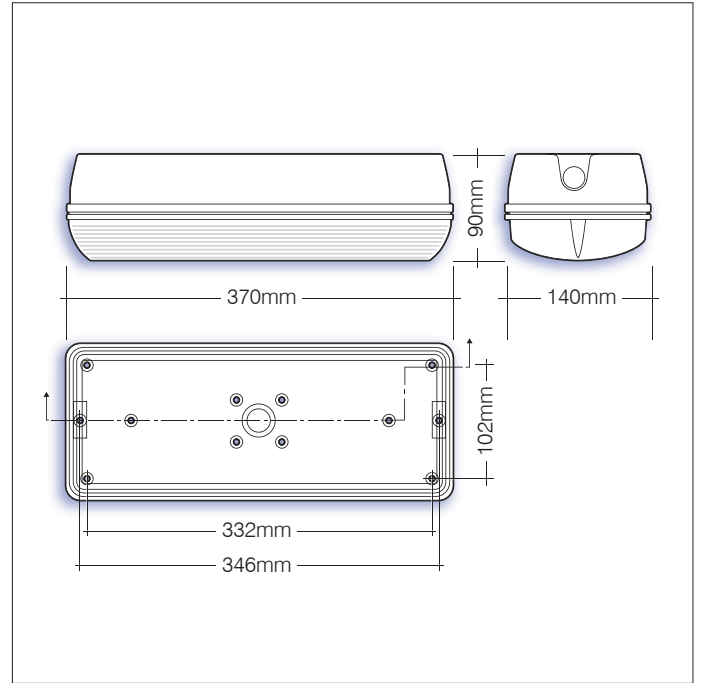

Key features

- IP66 suitable for external environments
- Impact rating of IK10
- Efficacy of up to 100lm/W
- Nominal life time of 100,000 hours (L80,B10)
- Battery: 1 x LiFePO4 3.2V 4.5Ah
- Light source: 18 x 4000K LEDs (CRI>80)
- Weight: 1.1 kg

Options

- For self test emergency suffix **/ST**
- For DALI addressable emergency suffix **/EMP**
- For antimicrobial technology suffix **/AMT**

Part No.

Description

JP/LED/NM	Non-maintained bulkhead
JP/LED/M	Maintained bulkhead
JP/LED/240	240V bulkhead

For more information, please contact Sales@ldl.lighting

