


Boxster Direct/In-Direct Wall Lighting



- 150lm/W @ 58lm/W ÷
- Impact rating of IK09
- IP65 suitable for external environments
- Nominal life-time of 50,000h (L80/B10)
- Colour stability with 3 step MacAdam
- Available in Black, White & Grey
- CRI 80 as standard, CRI 90 available on request

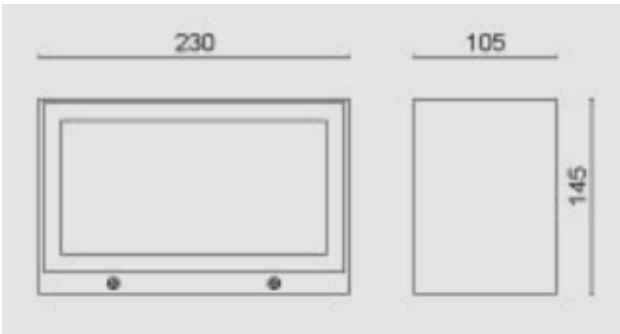


To Specify:

Select Part Number with additional options if required
e.g. **BOX/5400/4**

= Boxster, 34W, 5400lm, 4000K

Part No.	W	lm	lm/W	CCT
BOX/1780/4	12	1780	142	4000K
BOX/2240/4	17	2240	131	4000K
BOX/3560/4	25	3560	142	4000K
BOX/5400/4	34	5400	158	4000K

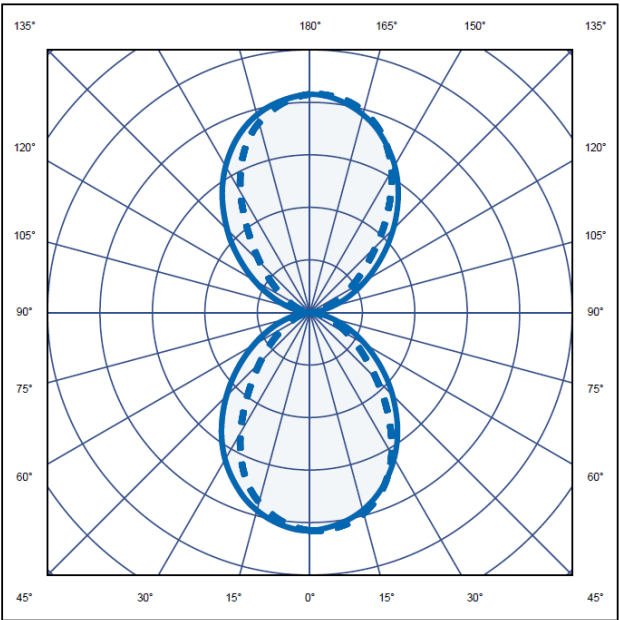

Options

- For Emergency suffix
 - For DALI dimmable
 - For casambi enabled suffix
 - For wireless dimmable system suffix
 - For self-test suffix
 - For addressable emergency suffix
 - For wireless addressable emergency suffix
- /EMR
/DIM
/CAS
/WD
/ST
/EMP
/WAE

