


Cameron Outdoor Surface



- IP65 suitable for external/wet environments
- Impact rating of IK10
- Efficacy of up to 136lm/W
- Nominal life-time of 60,000h (L80/B10)
- High colour rendering index CRI > 80

CAM/L

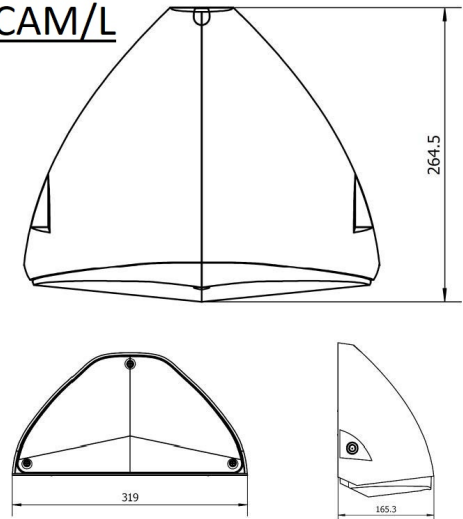


To Specify:


Select Part Number with additional options if required
e.g. **CAM/L/2541/4**

= Cameron Large, 21W, 2541lm, 4000K

CAM/M

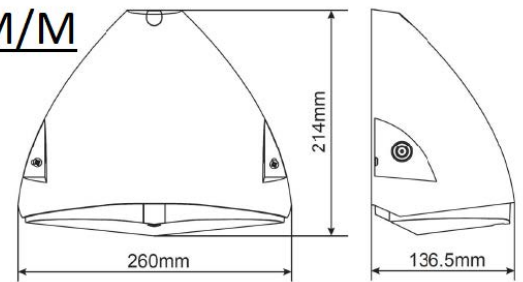

CAM/S

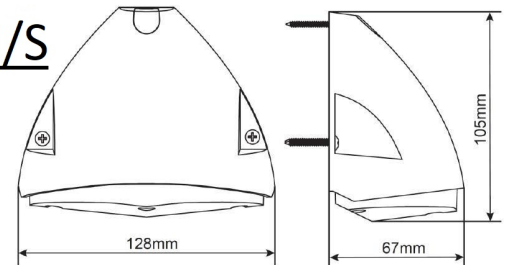

Part No.	W	lm	lm/W	CCT
CAM/S/548/3	4	548	137	3000K
CAM/S/584/4	4	584	146	4000K
CAM/M/1384/3	10	1384	138	3000K
CAM/M/1432/4	10	1432	143	4000K
CAM/L/2461/3	21	2461	117	3000K
CAM/L/2541/4	21	2541	121	4000K

Options

For 3 hour Maintained Emergency option suffix

For DALI Dimmable suffix

For 3hr Self-test emergency suffix

For DALI 3hr emergency suffix

/EMR

/DIM

/ST

/EMP