

Darcey Downlighter




- Efficacies up to 94lm/W
- Impact rating of IK02
- IP20/IP44
- Nominal life-time of 90,000h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI 80 as standard, CRI 90 available on request
- UGR < with baffle fitted
- Emergency BLF = 235lm
- White finish as standard , other finishes available on request

To Specify:

Select Part Number with additional options if required e.g. **DAR/800/4/DIM/EMR**

= Darcey 800lm, 9W, 4000K, DALI dimmable, 3hr emergency

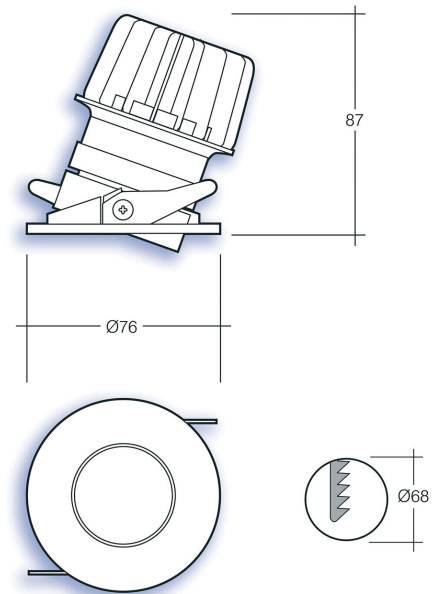

Part No.	W	lm	lm/W	CCT
DAR/740/3	9	740	86	3000K
DAR/800/4	9	800	94	4000K
DAR/980/3	13	980	76	3000K
DAR/1150/4	13	1150	91	4000K
DAR/1260/3	17	1260	74	3000K
DAR/1480/4	17	1480	88	4000K

Options

For DALI dimmable suffix

For Casambi enabled suffix

For leading/trailing edge dimmable suffix:

For 3hr emergency suffix

For 3hr self-test emergency suffix For 3hr

DALI emergency suffix

For IP44 freznel lens suffix:

/DIM
/CAS
/MDIM
/EMR
/ST
/EMP
/IP44

