


Dominique Pendant

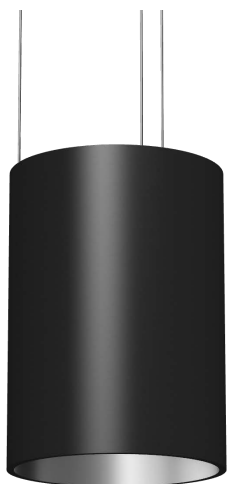

- IP20 suitable for internal environments
- Impact rating of IK05
- Efficacy of up to 109lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 275lm
- Manufactured using Tridonic components
- Weight = 1.5 kg

To Specify:

Select Part Number with additional options if required

e.g. **DOM/W/2200/4/DIM/EMR**

= Dominique suspended downlighter, wide 90° reflector, 2196 lumens, 4000K, DALI dimmable c/w 3hr self-contained emergency

Part No.	W	lm	lm/W	L(mm)	Beam Angle
DOM/N/1090/4	12	1092	95	450	60°
DOM/N/1580/4	17	1576	93	450	60°
DOM/N/2020/4	22	2024	92	450	60°
DOM/W/1260/4	12	1258	109	450	90°
DOM/W/1740/4	17	1741	103	600	90°
DOM/W/2200/4	22	2196	99	600	90°

Options


For 3000K suffix
 For DALI dimmable suffix
 For switch dimmable suffix
 For 3 hr emergency suffix
 For self-test suffix
 For DALI addressable emergency suffix
 For Casambi enabled suffix

/3
 /DIM
 /MDIM
 /EMR
 /ST
 /EMP
 /CAS


Accessories

For 2m suspension kit
 For 5m suspension kit

DOM/WIRE
 DOM/WIRE/5

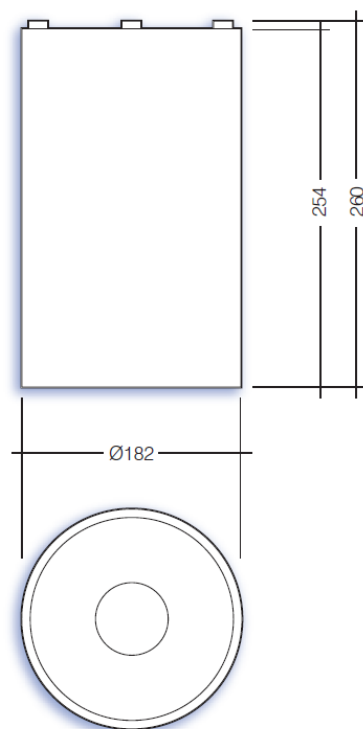

Narrow 60°



Wide 90°

