


Emily Recessed Modular

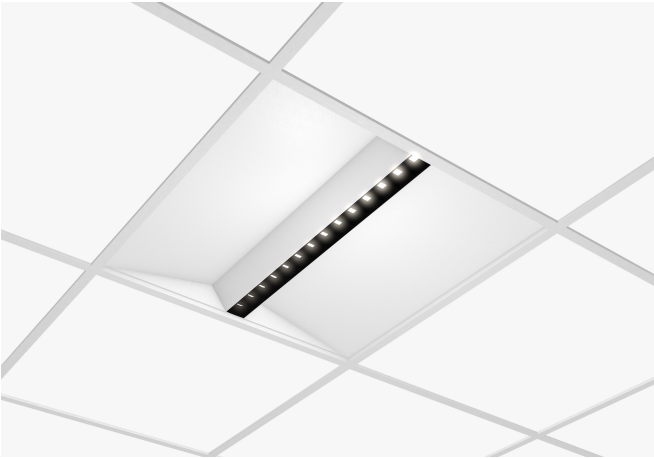

- Efficacies up to 151lm/W
- Colour stability with 3 step MacAdam
- Material: PC white and black
- 50,000 hour life expectancy (L90, B10)
- IP20 suitable for internal environments
- Impact Rating of IK08
- CRI > 80 as standard, CRI > 90 available
- Tunable white option
- Optical efficiency up to 92%
- Light emission angle 90° for high uniformity
- Optics with constant light colour over beam angle (CLC)
- UGR optimized optics with grid

To Specify:

Select Part Number with additional options if required e.g. **EMI/W/3000/4/CAS**

= Emily, 26w, 3667lumens, 4000K, Casambi enabled

Part No.	W	lm	lm/W	CCT
EMI/*/1500/4	11	3020	102	4000K
EMI/*/1500/4	11	3990	100	4000K
EMI/*/2000/4	16	4900	98	4000K
EMI/*/2000/4	16	3020	102	4000K
EMI/*/2500/4	21	3990	100	4000K
EMI/*/2500/4	21	4900	98	4000K
EMI/*/3000/4	26	3020	102	4000K
EMI/*/3000/4	26	3990	100	4000K
EMI/*/4000/4	31	4900	98	4000K
EMI/*/4000/4	31	4900	98	4000K

Options

For DALI dimmable suffix
 For linear white grid louvre
 For linear black grid louvre
 For Casambi enabled suffix
 For wireless dimmable system suffix
 For 3hr emergency suffix
 For 3hr self-test emergency suffix
 For 3hr DALI emergency suffix
 For wireless addressable emergency suffix

/DIM
 /EMI/W
 /EMI/B
 /CAS
 /WD
 /EMR
 /ST
 /EMP
 /WAE

