


Evie Direct/In-Direct Wall light

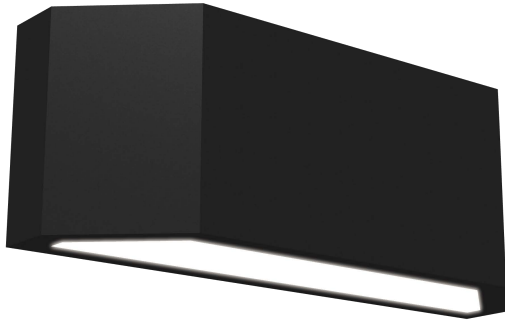


- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 92lm/W
- Nominal life-time of 72,000h (L80/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 300 lm
- CRI 80 as standard, CRI 90 available on request

To Specify:

Select Part Number with additional options if required
e.g. **EVI/1484/3/BLK/CAS**

= Evie wall light, 17W, 1484lm, 3000K, black finish, Casambi enabled

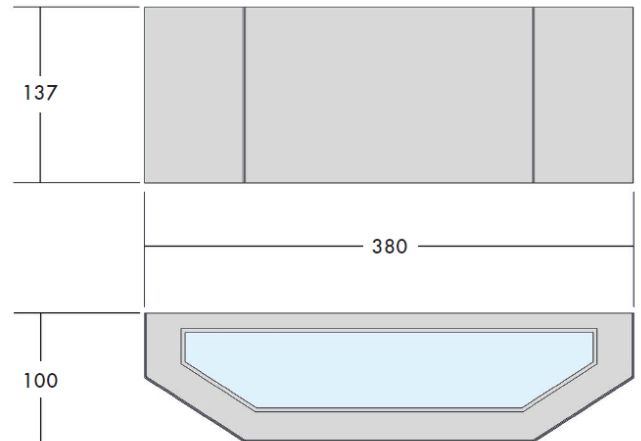

Part No.	W	lm	lm/W	CCT
EVI/1042/3	12	1042	87	3000K
EVI/1102/4	12	1102	92	4000K
EVI/1484/3	17	1484	87	3000K
EVI/1565/4	17	1565	92	4000K
EVI/2069/3	25	2069	83	3000K
EVI/2207/4	25	2207	88	4000K

Options

For 3 hour Maintained Emergency option suffix

For DALI Dimmable suffix

For 3hr Self-test emergency suffix

For DALI 3hr emergency suffix

For White suffix

For Black suffix

For Microprismatic

For wireless dimmable suffix

For wireless addressable emergency suffix

/EMR

/DIM

/ST

/EMP

/WHI

/BLK

/CAS

/WD

/WAE

