

Hemera L Downlighter



- Impact rating of IK10 (with SG8 & SG9)
- IP20 suitable for internal environments
- Nominal life-time of 60,000h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 291lm

To Specify:

Select Part Number with additional options if required

e.g. **HEM/L/1850/4/DIM/ST**

= Hemera L, 1850lm, 17W, 4000K, DALI dimmable c/w self-test emergency

Part No.	W	lm	lm/W	CCT
HEM/L/1075/3	10	1075	107	3000K
HEM/L/1175/4	10	1175	117	4000K
HEM/L/1850/3	17	1850	108	3000K
HEM/L/2000/4	17	2000	107	4000K
HEM/L/2850/3	30	2850	95	3000K
HEM/L/3075/4	30	3075	102	4000K
HEM/L/4425/3	46	4425	96	3000K
HEM/L/4800/4	46	4800	104	4000K

Options

For DALI dimmable suffix

For Casambi enabled suffix

For tunable white suffix

For 3hr emergency suffix

For self-test emergency suffix

For DALI addressable emergency suffix

For wireless dimmable system suffix

For wireless addressable emergency suffix

For Anti-Ligature suffix

/DIM

/CAS

/TW

/EMR



/ST

/EMP


/WD

/WAE

/AL

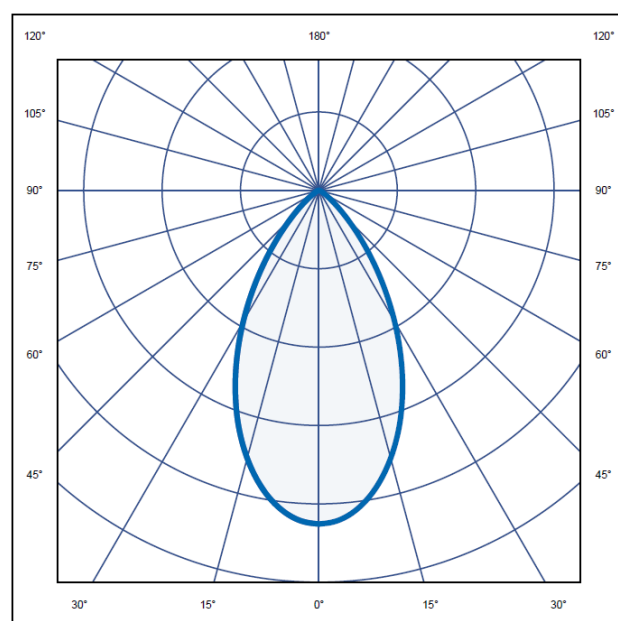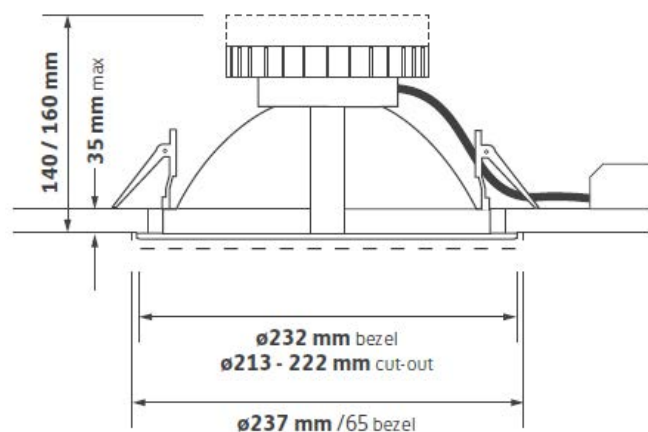

Hemera L Downlighter



/T+DALI
Touch dimming / DALI




/MF40
40° multi-faceted reflector



/EM
Emergency (remote indicator)



/EMD
DALI and self-test emergency
(remote indicator)

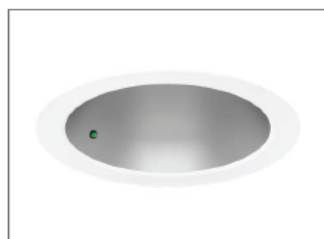

/EMI
Emergency (integral indicator)




/EMDI
DALI and self-test emergency
(integral indicator)



/54
Clear IP54 sealed lens



/65
Bezel adapted to accept IP65 over-
bezel



Product Variation
Bezel available in any RAL colour



/BTC
Casambi Bluetooth wireless network
(inc dim)

IP65 Bezel

Please specify with adapted bezel **/65**



IP65/002/240
IP65 bezel - White RAL9010 with clear
glass



IP65/008/240
IP65 bezel - White RAL9010 with opal
polycarbonate



IP65/009/240
IP65 bezel - White RAL9010 with clear
polycarbonate



GF008 / GF010
Anti-tamper driver / Anti-tamper bit
for IP65 bezel