


Hemera Square Downlighter



- Efficacies up to 123lm/W
- IP20 suitable for internal environments
- Nominal life-time of 60,000h (L70/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 291lm

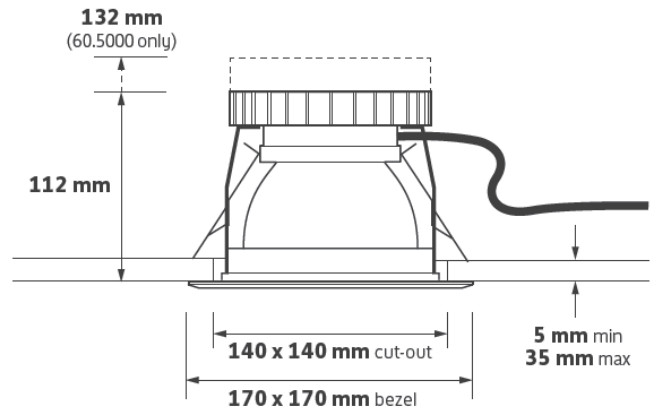


To Specify:

Select Part Number with additional options if required
e.g. **HEM/S/1200/4/DIM/ST/SG2**

= Hemera Square, 1200lm, 10W, 4000K, DALI dimmable c/w self-test emergency

Part No.	W	lm	lm/W	H(mm)	CCT
HEM/S/1125/3	10	1125	114	132	3000K
HEM/S/1200/4	10	1200	123	132	4000K
HEM/S/1925/3	17	1925	109	132	3000K
HEM/S/2100/4	17	2100	118	132	4000K
HEM/S/2950/3	30	2950	97	132	3000K
HEM/S/3200/4	30	3200	105	132	4000K

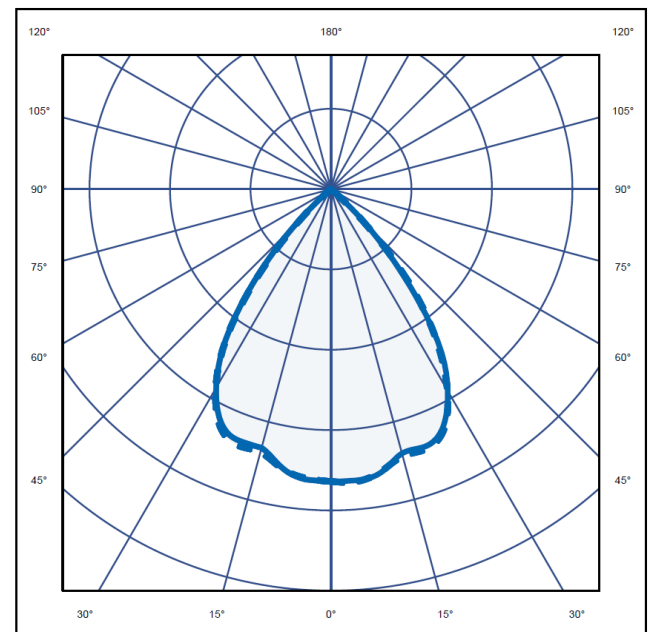

Options

For DALI dimmable suffix

For Casambi enabled suffix

For tunable white suffix

For 3hr emergency suffix

For self-test emergency suffix

For DALI addressable emergency suffix

For wireless addressable emergency suffix

/DIM

/CAS

/TW

/EMR

/ST

/EMP

/WAE

Hemera Square Downlighter



/CA
Clear acrylic



/OA
Opal acrylic



/CASH
Clear acrylic square halo



/OASH
Opal acrylic square halo

PV - PRODUCT VARIATIONS



PV - Contact Sales
Any RAL colour bezel



PV - Contact Sales
Black reflector