



Imogen System - Suspended

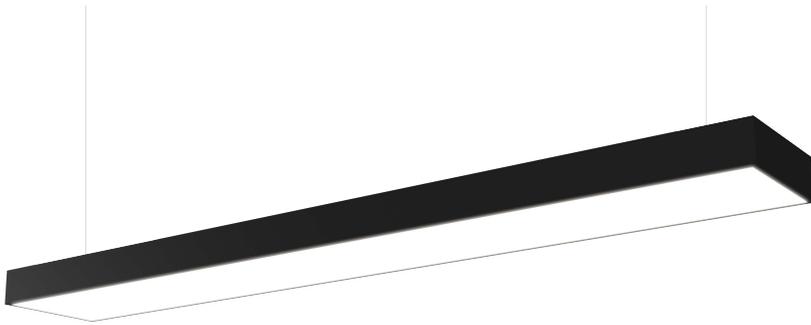

- IP40 suitable for indoor environments
- Impact rating of IK08
- Efficacy of up to 141lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 445lm
- High colour rendering index CRI > 80

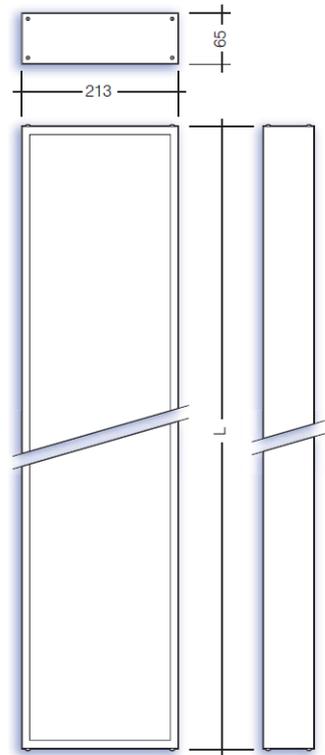

To Specify:

Select Part Number with additional options if required

e.g. **IM/14/5496/4/S/B/DIM/EMP**

= Imogen 1450mm, Suspended Black Luminaire, 5496lm, 42w, 4000K, DALI Dimmable c/w DALI EM-PRO 3hr emergency

Part No.	W	lm	lm/W	L(mm)
IM/11/1997/4	14	1997	141	1170
IM/11/2645/4	19	2645	139	1170
IM/11/3255/4	24	3255	135	1170
IM/14/3225/4	23	3225	135	1450
IM/14/4347/4	33	4347	131	1450
IM/14/5496/4	42	5496	129	1450

Options

- For microprismatic suffix
- For opal suffix
- For Surface/Suspended suffix
- For Recessed suffix
- For Black suffix
- For White suffix
- For DALI Dimmable suffix
- For Self-Contained 3hr emergency suffix
- For 3hr Self-test emergency suffix
- For DALI EM-PRO 3hr emergency

/MP
/OP
/S
/R
/B
/W
/DIM
/EMR
/ST
/EMP

Options

- For 2m wire suspension

/IM/WIRE/2M

