


JP Emergency Bulkhead



- Efficacy of up to 100lm/W
- Impact rating of IK10
- IP66 suitable for external environments
- Nominal life time of 100,000 hours (L80/B10)
- Battery: 1 x LiFePO4 3.2V 4.5Ah
- Light source: 18 x 4000K LEDs (CRI 80)
- Weight: 1.1 kg

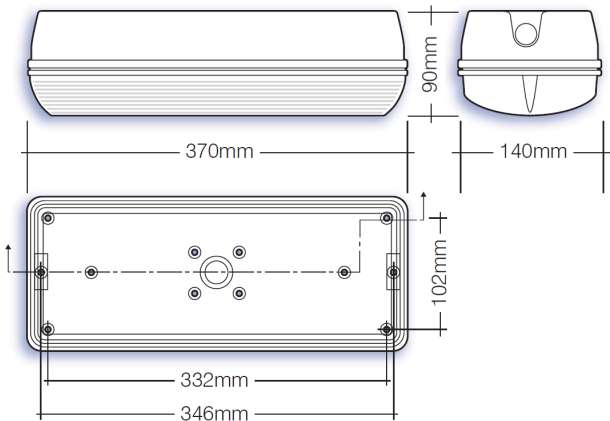

Part No.	Description
JP/LED/NM	Non-maintained bulkhead
JP/LED/M	Maintained bulkhead
JP/LED/240	240V Bulkhead

Options

- For self-test suffix
- For DALI addressable emergency suffix
- For antimicrobial technology suffix

/ST
/EMP
/AMT

