

Juna Downlighter




- Efficacies up to 132lm/W
- Impact rating of IK05
- IP20/IP54/IP65
- Nominal life-time of 90,000h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI > 80 as standard, CRI > 90 available on request
- Emergency BLF = 314lm
- White finish as standard, other finishes available on request

To Specify:

Select Part Number with additional options if required e.g. **JUN/1050/4/DIM/EMR/WHI**

= Juna, 1050 lumens, 4000K, DALI dimmable, 3hr emergency, white bezel

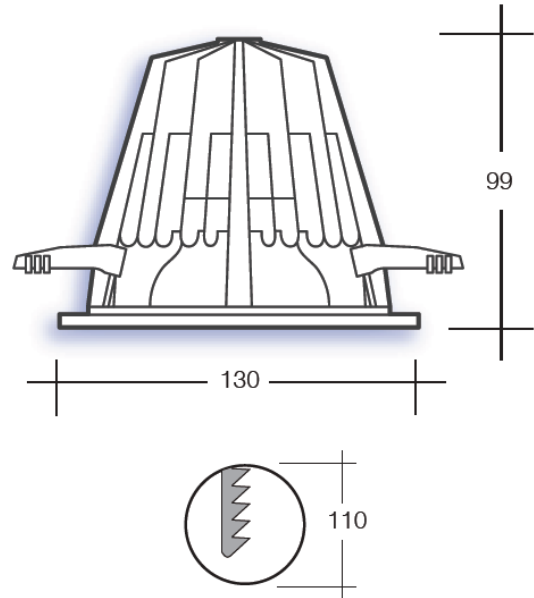


Part No.	W	lm	lm/W	CCT
JUN/1020/3	8	1020	128	3000K
JUN/1050/4	8	1055	132	4000K
JUN/1720/3	14	1725	125	3000K
JUN/1790/4	14	1787	129	4000K
JUN/2360/3	19	2363	123	3000K
JUN/2440/4	19	2442	127	4000K
JUN/3150/3	28	3146	113	3000K
JUN/3250/4	28	3252	117	4000K


Options

For Casambi enabled suffix
For DALI dimmable suffix
For 3hr emergency suffix
For 3hr self-test emergency suffix
For 3hr DALI emergency suffix
For leading/trailing edge dimmable suffix

/CAS
/DIM
/EMR
/ST
/EMP
/MDIM

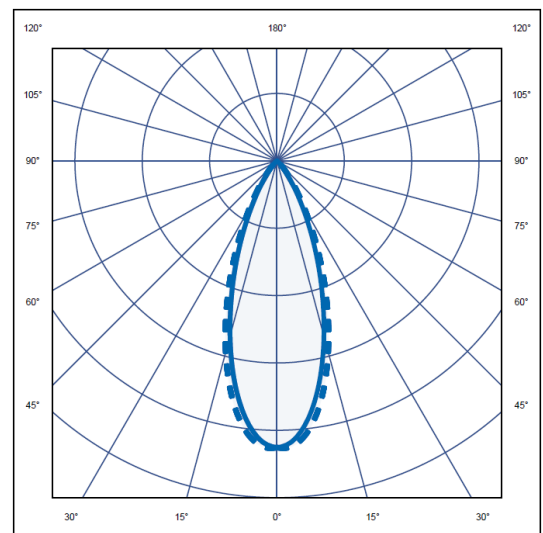

Accessories



Juna Downlighter

Clear drop glass /DG1



Frost outer drop glass /DG2



Frost centre drop glass /DG3



Frost drop glass /DG4



Clear halo drop glass /DG5



Frost halo drop glass /DG6



Frost drop ring /DG7



Blue drop ring /DG8



Black drop ring /DG9



Mesh trim fitted /MT



Juna Downlighter

IP54 clear glass

/SG1



IP54 centre frost glass

/SG2



IP54 frost glass

/SG3



IP54 clear polycarbonate

/SG4



IP54 opal polycarbonate

/SG5



IP44 prismatic lens

/SG6



Universal bezel -
for use with IP65 glasses

/UB



IP65 clear glass

/SG7



IP65 clear polycarbonate

/SG8



IP65 opal polycarbonate

/SG9



Frost Hi-Light

/HL1



Blue Hi-Light

/HL2



White Anti-Tamper Bezel

/ATWH

