

Kitty Floodlights



c/w fixed bracket



c/w adjustable bracket

To Specify:



Select Part Number with additional options if required

e.g. **KIT/120/5/A/FW**

= Kitty 120W LED Floodlight, 120w, Asymmetric, 9487lm, 5k, c/w Fixed Wall Bracket

- IP66 suitable for external environments
- Impact rating of IK08
- Nominal life-time of 50,000h (L80/B10)
- Efficacy of up to 150lm/W
- Various optics available

Part No.	Lm Option/F	Lm Option/A	W	CCT	Size
KIT/136/5	9220	6726	87	5000k	A
KIT/167/5	10545	9487	120	5000k	A
KIT/225/5	17360	16709	177	5000k	B
KIT/256/5	26980	25077	256	5000k	B

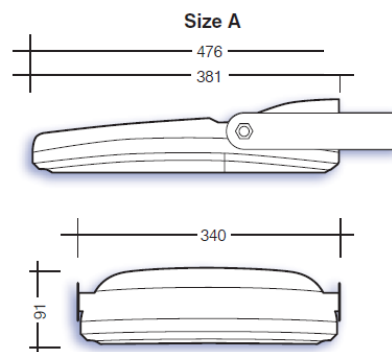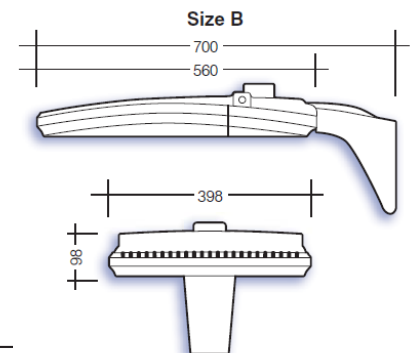

Options

For Flood Optic suffix

For Asymmetric Optic suffix

For DALI Dimmable suffix

For Column Mount Spigot suffix

For Adjustable Wall Bracket suffix

/F
/A
/FW
/CS
/AW

