

LDIP Recessed Modular





- Efficacies up to 127lm/W
- Emergency BLF = 282lm
- 100,000 hour life expectancy (L80, B10)
- IP65 suitable for internal environments
- Impact Rating of IK10
- High colour rendering index CRI > 80
- Colour stability with 3 step MacAdam
- Available in 3000K & 4000K

To Specify:

Select Part Number with additional options if required e.g. **LDIP/OP/4/4253/DIM/EMR**

= LDIP 600x600 modular, 4000K, 4253 lumens, DALI dimmable c/w 3hr self-contained emergency

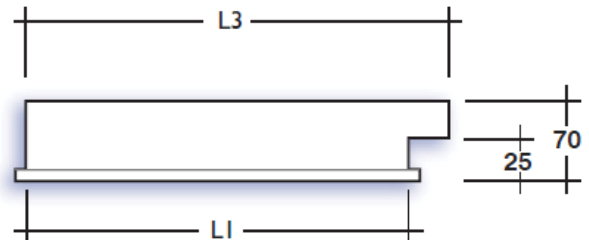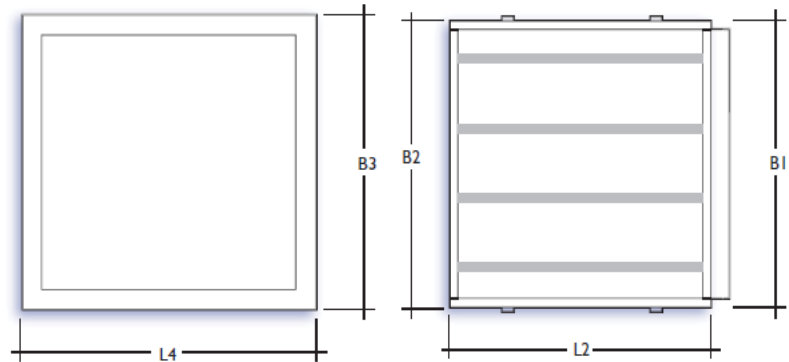

Nominal Length	L1	L2	L3	L4
1500	1435	1495	171	1500
1200	1135	1195	1171	1200
600	535	595	571	600

Nominal Width	B1	B2	B3
600	540	595	600
300	240	295	300

Part No.	W	Lm	lm/W	CCT
LDIP/OP/2684/4	21	2684	127	4000K
LDIP/OP/3224/4	25	3224	126	4000K
LDIP/OP/3746/4	30	3746	124	4000K
LDIP/OP/4253/4	34	4253	123	4000K
LDIP/OP/4744/4	39	4744	121	4000K
LDIP/MP/2484/4	21	2484	117	4000K
LDIP/MP/2984/4	25	2984	117	4000K
LDIP/MP/3468/4	30	3468	115	4000K
LDIP/MP/3937/4	34	3937	114	4000K
LDIP/MP/4391/4	39	4391	112	4000K

Options

For DALI dimmable suffix

For 3hr emergency suffix

For 3hr self-test emergency suffix

For 3hr DALI emergency suffix

/DIM
/EMR
/ST
/EMP

