

# Leila M Track Spotlight




- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 133lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Surface mounting also available via ceiling rose
- CRI 80 as standard, CRI 90 available on request

## To Specify:

Select Part Number with additional options if required  
e.g. **LEI/M/1401/4/60D/BLK/CAS**

= Leila medium trackspot, 10W, 1401lm, 4000K, 60D reflector, black finish, Casambi enabled

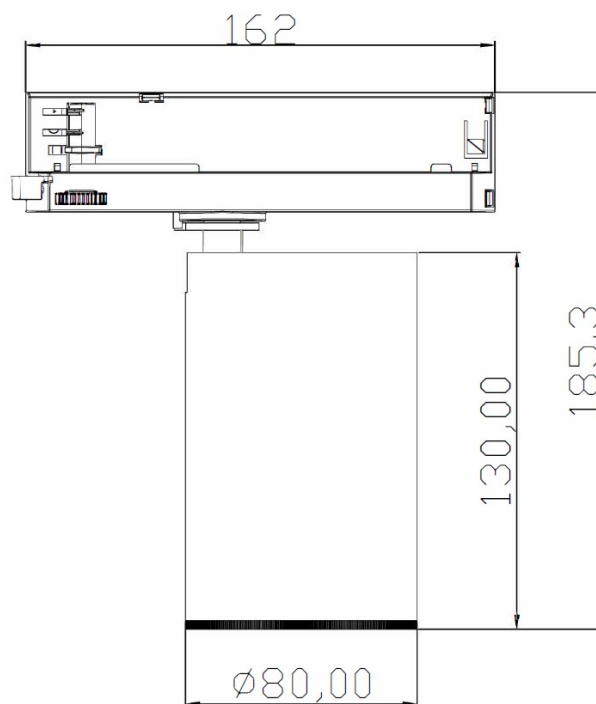

Part No. (3000K)	lm	W	lm/W
LEI/M/1273/15D/3	1273	10	120
LEI/M/2060/15D/3	2060	18	112
LEI/M/2698/15D/3	2698	26	103
LEI/M/1330/60D/3	1330	10	125
LEI/M/2149/60D/3	2149	18	117
LEI/M/2802/60D/3	2802	26	107


Part No. (4000K)	lm	W	lm/W
LEI/M/1340/15D/4	1340	10	127
LEI/M/2169/15D/4	2169	18	119
LEI/M/2840/15D/4	2840	26	109
LEI/M/1401/60D/4	1401	10	133
LEI/M/2263/60D/4	2263	18	124
LEI/M/2950/60D/4	2950	26	113

## Options


- For 15° reflector suffix **/15D**
- For 24° reflector suffix **/24D**
- For 36° reflector suffix **/36D**
- For 60° reflector suffix **/60D**
- For black mounted suffix **/BLK**
- For white finish suffix **/WHI**
- For DALI dimmable suffix **/DIM**
- For Casambi enabled suffix **/CAS**
- For Surface mounted **/SURF**

# Leila M Track Spotlight


15° Optic:

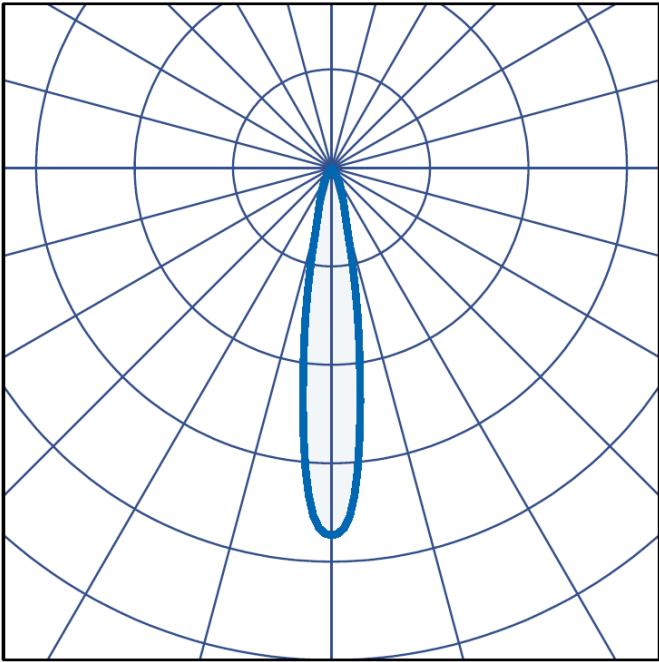

24° Optic:

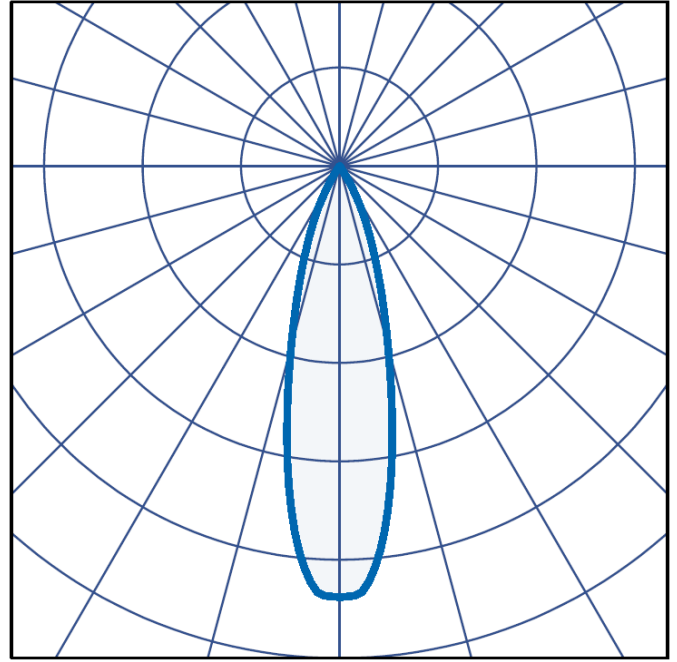

36° Optic:

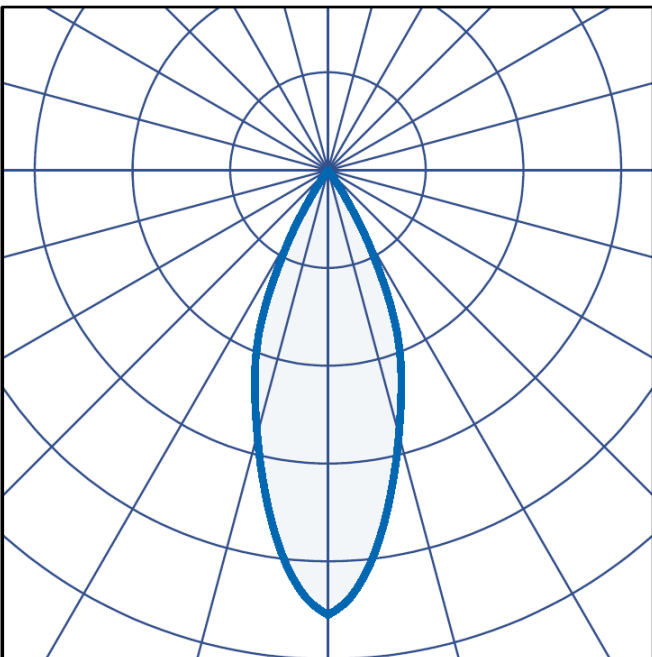

60° Optic:

