

Lola Bed Head Luminaire




- IP65 suitable for external/wet environments
- Impact rating of IK10
- Efficacy of up to 132lm/W
- Nominal life-time of 81,000h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 377 lumens

To Specify:

Select Part Number with additional options if required

e.g. **LOL/2620/4/CAS**

= Lola bulkhead, 21W, 2616lm, 4000K, white bezel, Casambi enabled

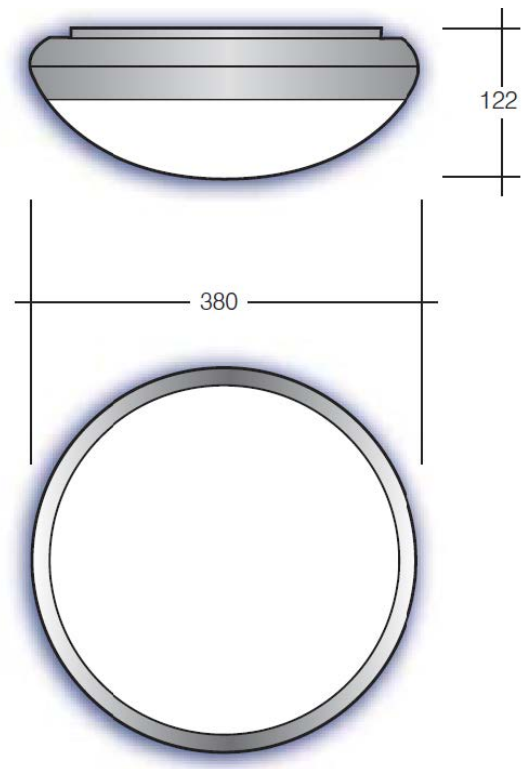

Part No.	W	lm	lm/W	CCT
LOL/1750/3	14	1751	125	3000K
LOL/1850/4	14	1845	132	4000K
LOL/2480/3	21	2481	120	3000K
LOL/2620/4	21	2616	127	4000K
LOL/2230/3	18	2231	123	3000K
LOL/2330/4	18	2326	128	4000K
LOL/2940/3	25	2945	118	3000K
LOL/3080/4	25	3080	123	4000K

Options

For Emergency suffix

For DALI dimmable

For self-test suffix

For DALI 3hr emergency suffix

For Casambi enabled suffix

For switch dimmable suffix

For wireless DALI dimmable suffix

For wireless DALI addressable emergency suffix

For brass bezel suffix

For chrome bezel suffix

For satin silver bezel suffix

For halo effect suffix

/EMR

/DIM

/ST

/EMP

/CAS

/SDIM

/WD

/WAE

/BR

/CH

/SS

/HA

Sensor Options

On-Off, no daylight control suffix

On-off, with daylight control suffix

Corridor function, no daylight control suffix

Corridor function, with daylight control suffix

Dimm to off, no daylight control suffix

Dimm to off, with daylight control suffix

/F1

/F2

/F3

/F4

/F5

/F6