


Lucie Pendant

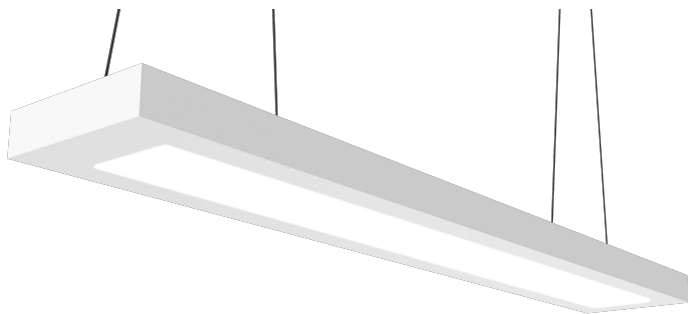

- IP20 suitable for internal environments
- Impact rating of IK06
- Efficacy of up to 135lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 334lm
- CRI 80 as standard, CRI 90 available on request

To Specify:

Select Part Number with additional options if required

e.g. **LUC/5496/4/DIM/EMP**

= Lucie LED Direct/In-direct, suspended luminaire, 5496lm, 4000K, DALI Dimmable c/w DALI Em-Pro 3hr emergency

Part No.	W	lm	lm/W	CCT
LUC/3225/4	23	3225	135	4000K
LUC/5496/4	42	5496	129	4000K
LUC/7630/4	62	7630	122	4000K

Options

For linear inter-connecting option suffix
 For DALI dimmable suffix
 For 3 hr emergency suffix
 For self-test suffix
 For DALI addressable emergency suffix

/LIN
/DIM
/EMR
/ST
/EMP

