


Maximo Floodlights



- IP66 suitable for external environments
- Impact rating of IK10
- Efficacy of up to 112lm/W
- Nominal life-time of 50,000h (L80/B10)
- Mounting heights of up to 24 metres

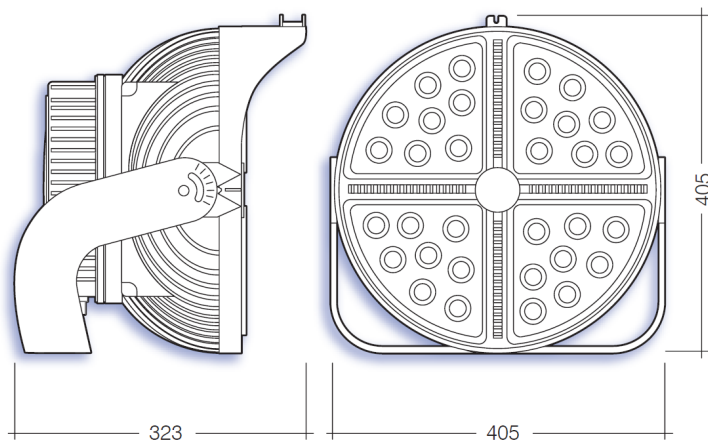

To Specify:


Select Part Number with additional options if required

e.g. **MAX/3/20/5**


= Maximo, 32942lm, 294W, 20°, 5000K

Part No.	W	Lm	Optic(°)	CCT	CRI
MAX/3/10/4	294	31,006	10	4000k	80
MAX/3/10/5	294	31,283	10	5000k	80
MAX/3/15/4	294	32,008	15	4000k	80
MAX/3/15/5	294	32,799	15	5000k	80
MAX/3/20/4	294	31,873	20	4000k	80
MAX/3/20/5	294	32,942	20	5000k	80
MAX/6/10/4	588	60,276	10	4000k	80
MAX/6/10/5	588	61,893	10	5000k	80
MAX/6/15/4	588	63,573	15	4000k	80
MAX/6/15/5	588	64,973	15	5000k	80
MAX/6/20/4	588	63,005	20	4000k	80
MAX/6/20/5	588	63,972	20	5000k	80

10° Optic



15° Optic



20° Optic

