


Nova Floodlights



- IP66 suitable for external environments
- Impact rating of IK10
- Efficacy of up to 119lm/W
- Nominal life-time of 102,000h (L90/B10)
- Various optics available

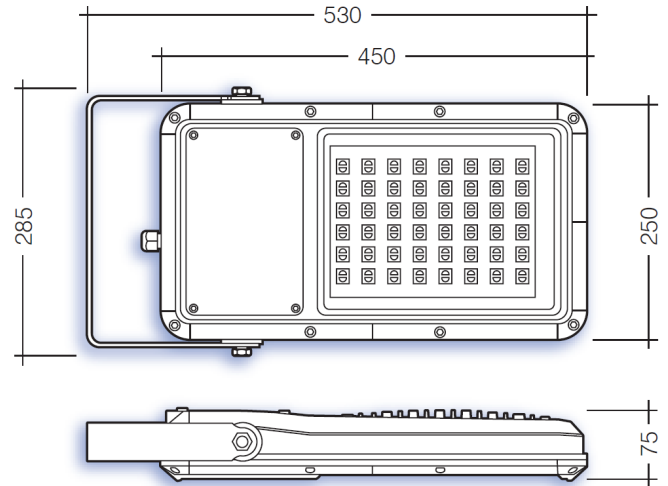

To Specify:

Select Part Number with additional options if required

e.g. **NOV/L8/12100/4**

= Nova, L8 Forward Lens, 12101lm, 102W, 4000K

L8 Forward Flood Lens

Part No.	Lm	W	CRI	Surge Protection
NOV/L8/9000/4	9026	76	70	10kV
NOV/L8/12100/4	12101	102	70	10kV
NOV/L8/15400/4	15439	165	70	10kV

L2 Wide Flood Lens

Part No.	Lm	W	CRI	Surge Protection
NOV/L2/8000/4	7984	76	70	10kV
NOV/L2/10700/4	10731	102	70	10kV
NOV/L2/13200/4	13156	165	70	10kV

