

OM Decorative Bulkhead



- IP20 suitable for internal environments
- Impact rating of IK06
- Efficacy of up to 142lm/W
- Nominal life-time of 72,000h (L80/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 420lm
- High colour rendering index CRI > 80
- TP(a) fire rated

To Specify:

Select Part Number with additional options if required
e.g. **OM/PC/3060/4/COR/ST**

= OMA, Polished Chrome, 3400 lumens, 31W, 4000K, corridor function,
c/w self-test emergency

Part No.	W	lm	lm/W	CCT
2160/3	23	2319	101	3000K
2270/4	23	2521	110	4000K
2910/3	31	3345	108	3000K
3060/4	31	3636	117	4000K
3600/3	39	4159	107	3000K
3790/4	39	4521	116	4000K

Bezel Options	H	D
OM	120	595
OMA	120	450
OMR	120	495

Options

For 3 hour Maintained Emergency option suffix

For DALI Dimmable suffix

For 3hr Self-test emergency suffix

For DALI 3hr emergency suffix

For White suffix

For polished gold trim suffix

For polished chrome trim suffix

For integral sensor suffix

For corridor function (10%) suffix

/EMR

/DIM

/ST

/EMP


/WHI

/PG

/PC

/SEN

/COR

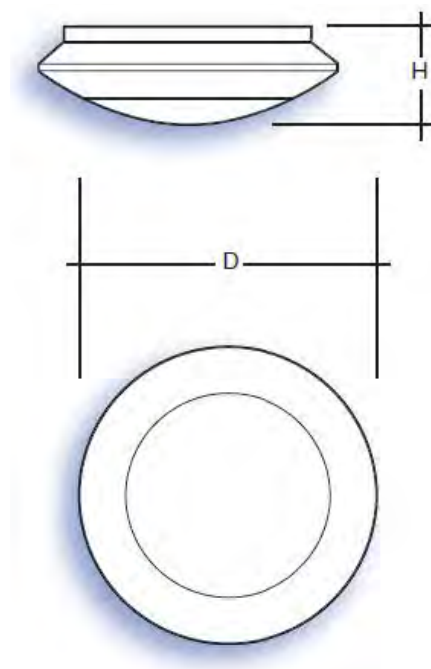

Polished Chrome



Polished Gold



White