

Oscar Downlighter



- Efficacies up to 91lm/W
- Impact rating of IK04
- IP20
- Nominal life-time of 90,000h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI > 80 as standard, CRI > 90 available on request
- Emergency BLF = 251lm

To Specify:

Select Part Number with additional options if required e.g. **OSC/1310/50/3/BLK/CAS**

= Oscar downlight, 1310 lumens, 14W, 50°, 3000K, black bezel & Casambi enabled.

Part No.	W	lm	lm/W	Beam	CCT
OSC/1140/25/2	14	1136	80	25	2700K
OSC/1200/25/3	14	1205	84	25	3000K
OSC/1250/25/4	14	1245	87	25	4000K
OSC/1210/50/2	14	1213	85	50	2700K
OSC/1270/50/3	14	1267	89	50	3000K
OSC/1310/50/4	14	1310	91	50	4000K

Options

For a black finish suffix

For a white finish suffix

For DALI dimmable suffix

For Casambi enabled suffix


For leading/trailing edge dimmable suffix

For 3hr emergency suffix


For self-test emergency suffix

For DALI addressable emergency suffix

/BLK
/WHI
/DIM
/CAS
/MDIM
/EMR
/ST
/EMP

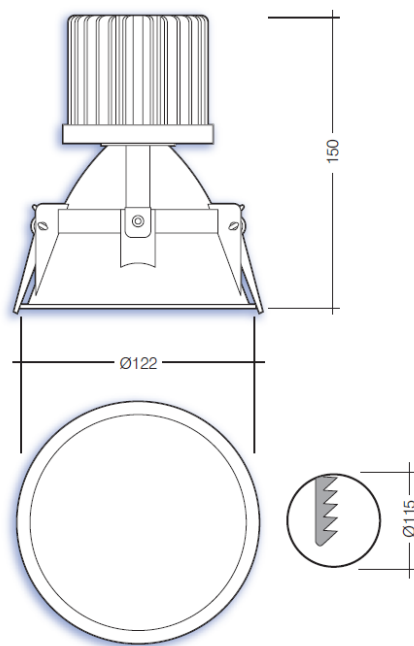

25° reflector

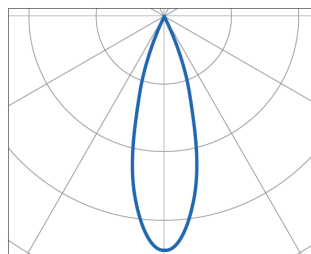

50° reflector

