


Polo Pendant


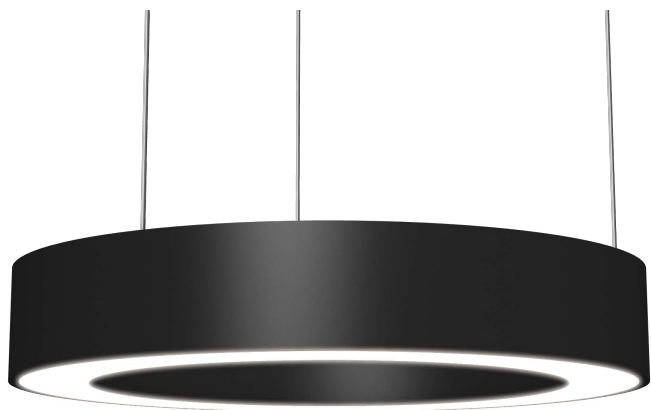


To Specify:

Select Part Number with additional options if required
e.g. **POLO/12/3204/84/DIM**

= Polo, ø1200, 3204lm, 26W, 4000K, DALI Dimmable

- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 123lm/W
- Nominal life-time of 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 90
- Custom sizes are also available on request

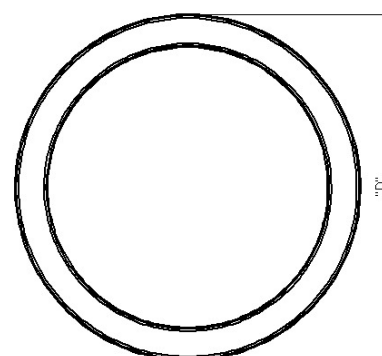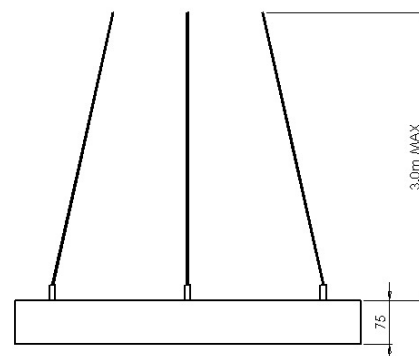

Part No.	W	lm	lm/W	D(mm)
POLO/6/1456/84	12	1456	122	ø600
POLO/6/2886/84	24	2886	119	ø600
POLO/6/4290/84	37	4290	116	ø600
POLO/12/3204/84	26	3204	123	ø1200
POLO/12/6350/84	52	6350	120	ø1200
POLO/12/9438/84	80	9438	117	ø1200

Options

For DALI Dimmable suffix

/DIM

