

Ravello Downlighter




- Efficacies up to 121lm/W
- Impact rating of IK02
- IP44 suitable for internal environments
- Nominal life-time of 100,000h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI > 80 as standard, CRI > 90 available on request
- Emergency BLF = 313lm

To Specify:

Select Part Number with additional options if required
e.g. **RAV/1700/4/OP/DIM/EMP**

= Ravello, 1700 lumens, 15W, 4000K, IP44 opal diffuser, DALI dimmable
c/w DALI emergency

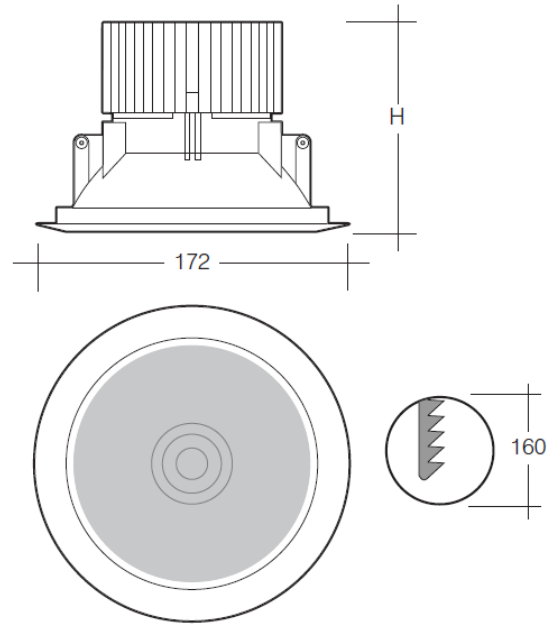

Part No.	W	lm	lm/W	H(mm)	CCT
RAV/1070/3	9	1070	119	80	3000K
RAV/1090/4	9	1090	121	80	4000K
RAV/1660/3	15	1660	111	80	3000K
RAV/1700/4	15	1700	113	80	4000K
RAV/2400/3	23	2400	104	115	3000K
RAV/2460/4	23	2460	107	115	4000K
RAV/3410/3	37	3410	92	115	3000K
RAV/3500/4	37	3500	95	115	4000K
RAV/4020/3	41	4020	98	145	3000K
RAV/4130/4	41	4130	101	145	4000K

Options

For DALI dimmable suffix	/DIM
For Casambi enabled suffix	/CAS
For leading/trailing edge dimmable suffix	/MDIM
For 3hr emergency suffix	/EMR
For self-test emergency suffix	/ST
For DALI addressable emergency suffix	/EMP