

# Rayz Feature Lighting



- Achieves 360° lighting
- Up to 5m continuous run, cuttable every 10mm
- Power of over 14W/M
- IP65 suitable for internal and external & external environments
- High Colour Rendering Index CRI > 80
- RGB and CCT available upon request
- Colour Stability within 3step MacAdam
- To achieve a defined shape or maintain rigidity, the poseable version must be specified.

## To Specify:

Select Part Number with additional options if required

e.g. **RAYZ/2700**

= Rayz 2700K, IP65, 24V LED

Part No.	W	lm	CCT
<b>RAYZ/27/770</b>	14	770	2700K
<b>RAYZ/4/810</b>	14	810	4000K
<b>RAYZ/TW</b>	N/A	N/A	2700K-6500K
<b>RAYZ/RGB</b>	N/A	N/A	N/A


## Options

For 2700K suffix

**/2700**

For 4000K suffix

**/4000**

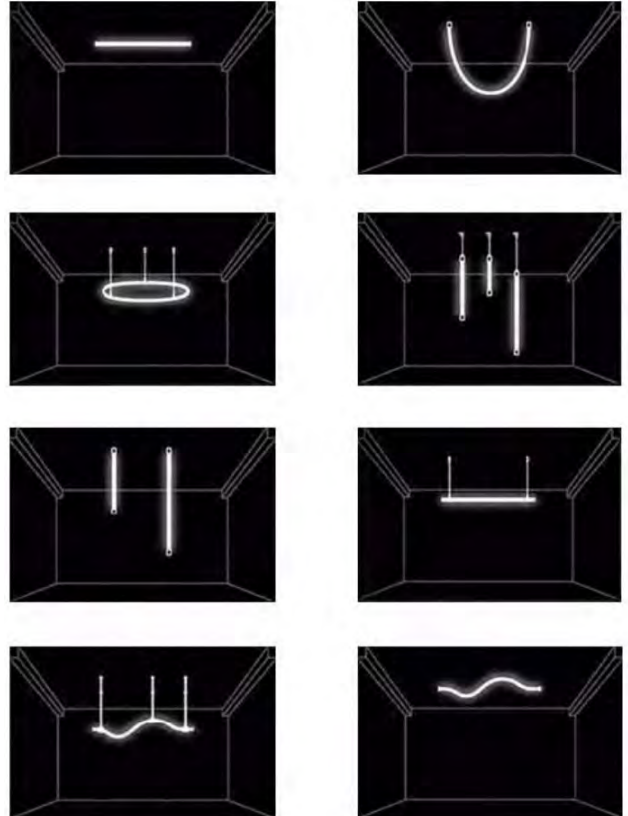

\* PLEASE NOTE: All lighting schemes utilising Rayz products must be accompanied by the relevant visualisations, which must be submitted for review before the design can be finalised\*

# Rayz Feature Lighting

/TUBE



/END



/PROFILECLIP



/PLASTICCLIP



/POLYCLIP




/SUSPARM



/SUSPKIT



/VSM (used to mount the fitting vertically off the surface)

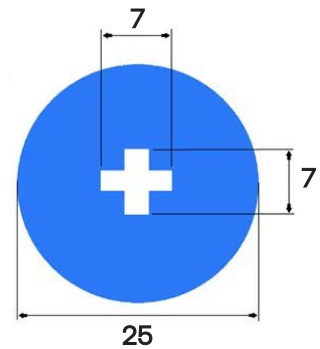

\* PLEASE NOTE: All lighting schemes utilising Rayz products must be accompanied by the relevant visualisations, which must be submitted for review before the design can be finalised\*