

REX Recessed Modular




- Efficacies up to 120lm/W
- TP(a) Rated
- LG7 Compliant
- UGR < 19
- 81,000 hour life expectancy (L80, B10)
- IP44 suitable for internal environments
- Impact Rating of IK05
- High colour rendering index CRI > 80

To Specify:

Select Part Number with additional options if required e.g. **REX/3220/4/TPA/DIM/ST**
 = Rex , 27w, 3220lumens, 4000K, DALI dimmable c/w self-test emergency

Part No.	W	lm	lm/W	CCT
REX/2100/4/TPA	17	2100	119	4000K
REX/3220/4/TPA	27	3220	119	4000K
REX/4193/4/TPA	36	4193	115	4000K

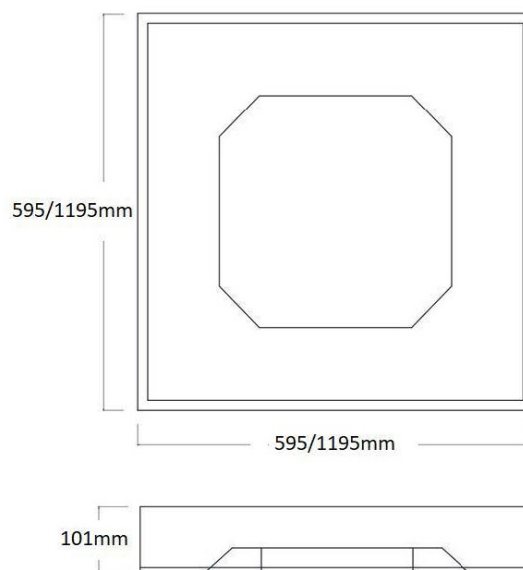

Options

For DALI dimmable suffix
 For Casambi enabled suffix
 For 3hr emergency suffix
 For 3hr self-test emergency suffix
 For 3hr DALI emergency suffix
 For wireless addressable emergency

/DIM
 /CAS
 /EMR
 /ST
 /EMP
 /WAE

