

Ruby Downlighter




- Efficacies up to 115lm/W
- Impact rating of IK04
- IP20
- Nominal life-time of 90,000h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI > 80 as standard, CRI > 90 available on request
- Emergency BLF = 304lm

To Specify:


Select Part Number with additional options if required e.g. **RUB/1170/30/4/WHI/CAS**

= Ruby downlight, 1169 lumens, 10W, 30°, 4000K, white bezel & Casambi enabled

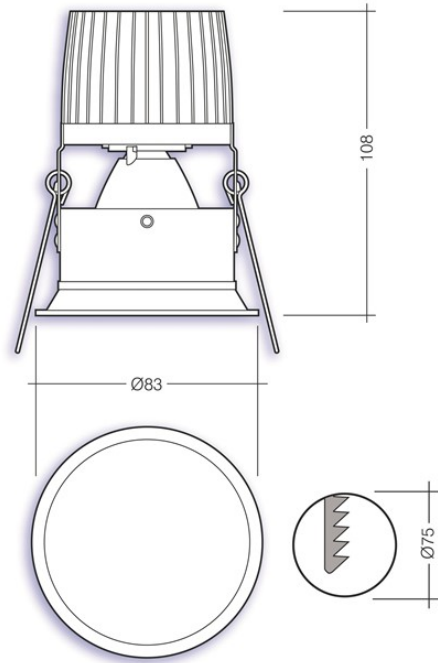


Part No.	W	lm	lm/W	Beam	CCT
RUB/1050/30/2	10	1052	104	30	2700K
RUB/1080/30/3	10	1080	107	30	3000K
RUB/1170/30/4	10	1169	115	30	4000K
RUB/1020/40/2	10	1017	100	40	2700K
RUB/1040/40/3	10	1042	103	40	3000K
RUB/1120/40/4	10	1125	111	40	4000K

30° reflector

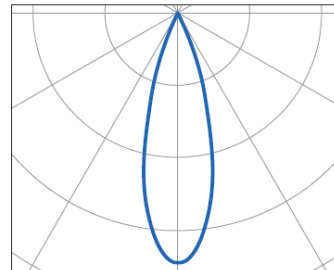

40° reflector

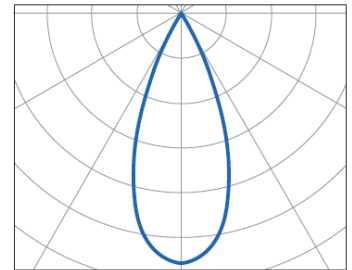

Options

For a black finish suffix

For a white finish suffix

For DALI dimmable suffix

For Casambi enabled suffix

For leading/trailing edge dimmable suffix

For 3hr emergency suffix

For self-test emergency suffix

For DALI addressable emergency suffix

/BLK
/WHI
/DIM
/CAS
/MDIM
/EMR
/ST
/EMP