


Slot Recessed Modular

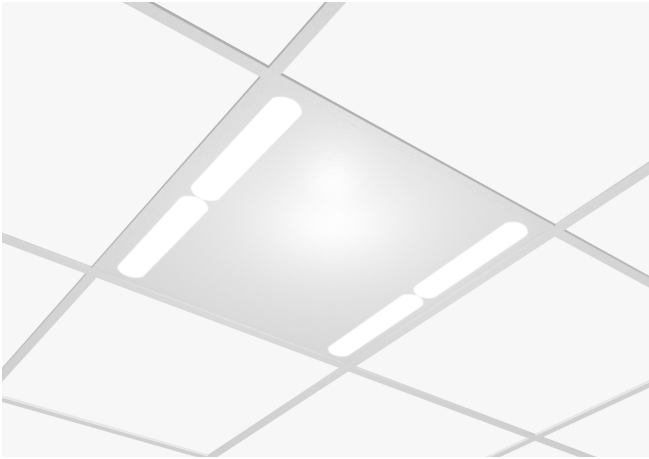

- Efficacies up to 126lm/W
- Emergency BLF = 342lm
- 100,000 hour life expectancy (L80, B10)
- IP40 suitable for internal environments
- Impact Rating of IK04
- High colour rendering index CRI > 80
- Colour stability with 3 step MacAdam

To Specify:


Select Part Number with additional options if required e.g. **SL123/4738/4/DIM/EMP**
 = Slot 1200x300, 4738 lumen, 4000k, dimmable c/w 3hr Dali emergency

Part No.	W	Lm	lm/W	CCT
SL66/2896/4	24	2896	120	4000K
SL66/3485/4	29	3485	120	4000K
SL66/4068/4	34	4068	119	4000K
SL66/4590/4	39	4590	117	4000K
SL66/5134/4	44	5134	115	4000K
SL123/3563/3	28	3563	126	3000K
SL123/4738/4	38	4738	124	4000K
SL123/5829/3	48	5829	121	3000K
SL123/6946/4	58	6946	119	4000K

SL66



SL123

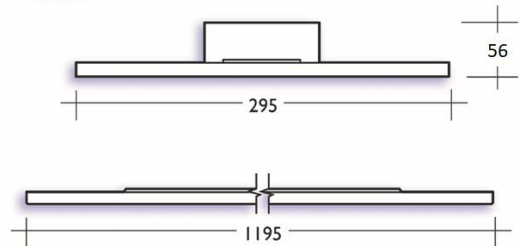

Options

For surface option suffix (recessed is standard)
 For DALI dimmable suffix
 For 3hr emergency suffix
 For 3hr self-test emergency suffix
 For 3hr DALI emergency suffix

/SF
 /DIM
 /EMR
 /ST
 /EMP

