

TR2 LED Emergency Downlight



- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 109lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Colour stability with 3 step MacAdam

To Specify:

Select Part Number with additional options if required

e.g. **TR2/3/NM/DALI/OA**

= TR2 LED emergency, Non-maintained, DALI addressable c/w Open Area Optic

Part No.	Lm	W	Halo	Weight	CCT
TR2/SF/2	217	2	109	0.3kg	6500K
TR2/SF/3/HO	400	3	133	0.3kg	6500K

Options

For Open Area Optic suffix





For Corridor Area Optic suffix

For Narrow Optic suffix


/OA

/CO


/NA

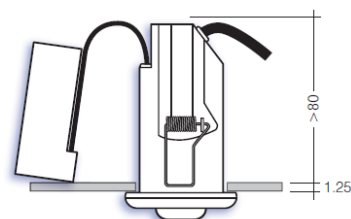

Corridor



Spot



Open Area

