

Vega Floodlights



- IP66 suitable for external environments
- Impact rating of IK09
- Efficacy of up to 156lm/W
- Nominal life-time of 102,000h (L90/B10)
- Various optics available


To Specify:

Select Part Number with additional options if required

e.g. **VEG/L8/27100/4**

= Vega, L8 optic, 27137lm, 172W, 4000K

Part No.	W	Lm	Lm/W	CCT	Weight(kg)
VEG/L2/19300/4	143	19,309	135	4000k	11.2
VEG/L2/22700/4	173	22,695	131	4000k	11.2
VEG/L2/25700/4	210	25,709	123	4000k	11.4
VEG/L2/28700/4	242	28,700	119	4000k	11.4
VEG/L2/31800/4	278	31,835	114	4000k	11.4
VEG/L2/35700/4	328	35,684	109	4000k	11.4
VEG/L8/22600/4	140	22,643	161	4000k	11.2
VEG/L8/27100/4	172	27,137	156	4000k	11.2
VEG/L8/30600/4	210	30,590	146	4000k	11.4
VEG/L8/34200/4	242	34,243	141	4000k	11.4
VEG/L8/37900/4	279	37,896	136	4000k	11.4
VEG/L8/42100/4	327	42,099	129	4000k	11.4

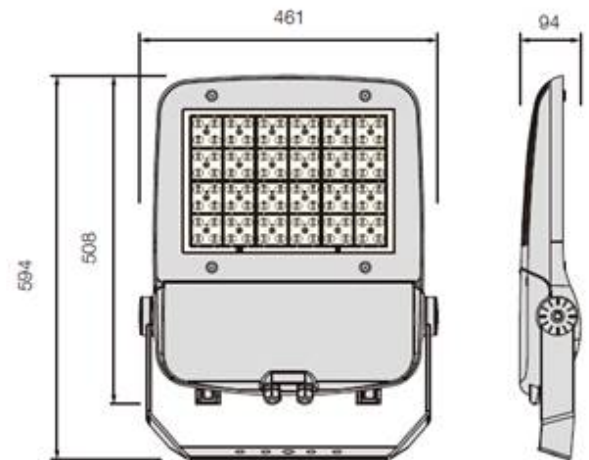

L8 Optic

