


# Walton Linear Surface – Anti Ligature

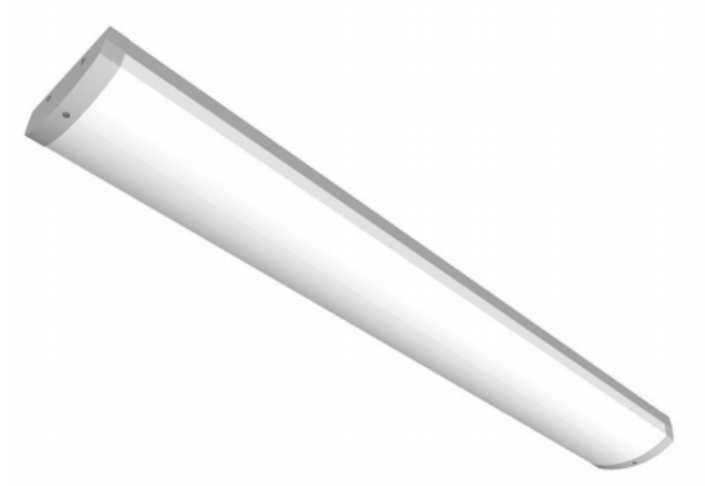

- IP54 suitable for internal environments, IP65 also available
- Impact rating of IK12
- Efficacy of up to 148lm/W
- Nominal life-time of 100,000h (L80/B10)

## To Specify:

Select Part Number with additional options if required

e.g. **WAL/5/5935/4/DIM/EMR**

= Walton LED surface luminaire, 5935lm, 4K, DALI Dimmable/w 3hr emergency.

| Part No.            | W  | lm   | lm/W | L(mm) |
|---------------------|----|------|------|-------|
| <b>WAL/2/1415/4</b> | 10 | 1415 | 148  | 580   |
| <b>WAL/2/2350/4</b> | 17 | 2350 | 137  | 580   |
| <b>WAL/2/3262/4</b> | 25 | 3262 | 131  | 580   |
| <b>WAL/4/2828/4</b> | 19 | 2828 | 148  | 1190  |
| <b>WAL/4/4759/4</b> | 34 | 4759 | 139  | 1190  |
| <b>WAL/4/6524/4</b> | 50 | 6524 | 131  | 1190  |
| <b>WAL/5/3526/4</b> | 24 | 3526 | 148  | 1470  |
| <b>WAL/5/5935/4</b> | 42 | 5935 | 139  | 1470  |
| <b>WAL/5/8241/4</b> | 62 | 8241 | 132  | 1470  |

## Options

For 3 hour Maintained Emergency option suffix

For DALI Dimmable suffix

For 3hr Self-test emergency suffix

For DALI 3hr emergency suffix

/EMR  
/DIM  
/ST  
/EMP

