

Zena Surface Outline Lighting



- Outdoor/ internal decorative lighting, architectural contour application
- Dimmable 24V constant voltage
- Efficacy of up to 74 lm/W
- Nominal life-time of 60,000 h
- High colour rendering index CRI > 90
- Top bend and side bend options
- Available in 5m or 10m lengths as standard
- RGBW available



To Specify:

Select Part Number with additional options if required
e.g. **ZENA/S/T/435/3/10m/DIM**

= Zena Surface, Top bend, 435 lumens per meter, 3000k, 10m, DALI Dimmable

Part No.	CCT	W/m	lm/m	lm/W
ZENA/435	2700K	7.2	435	60
ZENA/435	3000K	7.2	435	60
ZENA/485	4000K	7.2	485	67
ZENA/935	2700K	13	935	71
ZENA/965	3000K	13	965	74
ZENA/965	4000K	13	965	74

ZENA/320	2700K	7.2	320	44
ZENA/350	3000K	7.2	350	48
ZENA/370	4000K	7.2	370	51
ZENA/695	2700K	13	695	53
ZENA/740	3000K	13	740	56
ZENA/730	4000K	13	730	56

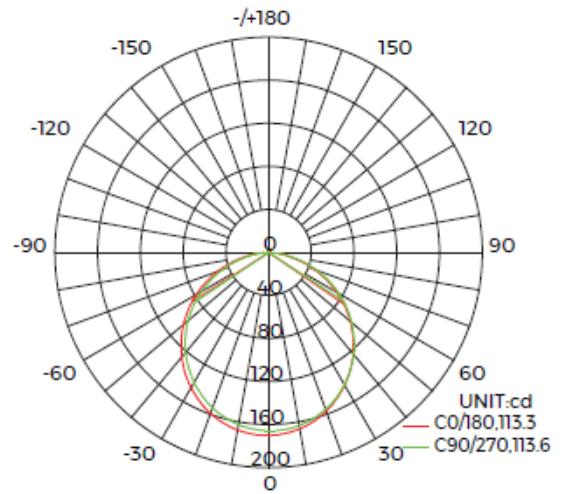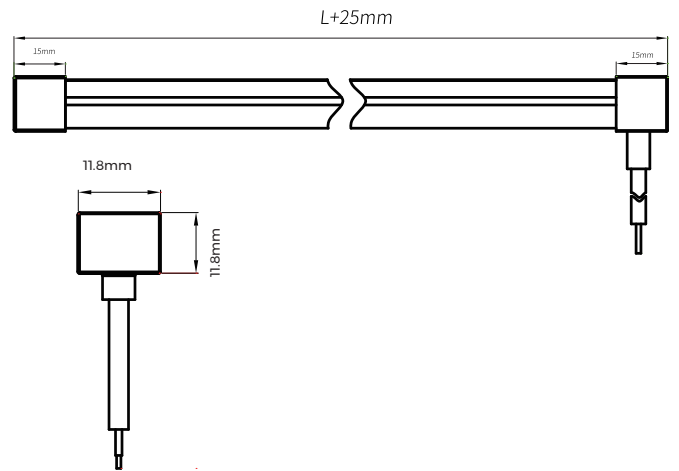

AVERAGE BEAM ANGLE(50%):113.4

Light distribution



Options

For 2700K suffix
For 3000K suffix
For 4000K suffix


/27
/3
/4

For 5m suffix
For 10m suffix


/5m
/10m

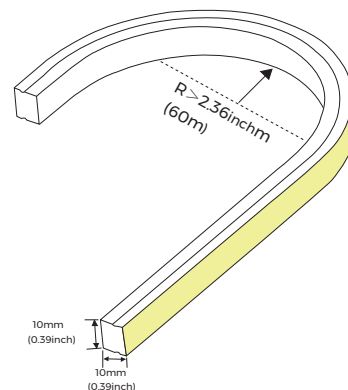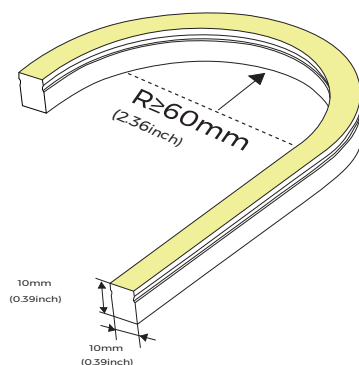

Zena Recessed Outline Lighting

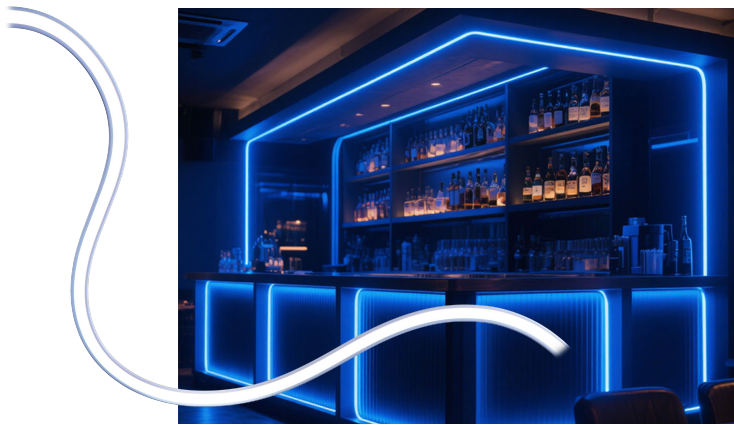

- Outdoor/ internal decorative lighting, architectural contour application
- Dimmable 24V constant voltage
- Efficacy of up to 74lm/W
- Nominal life-time of 60,000 h
- High colour rendering index CRI > 90
- Top bend and side bend options
- Available in 5m or 10m lengths as standard
- RGBW available

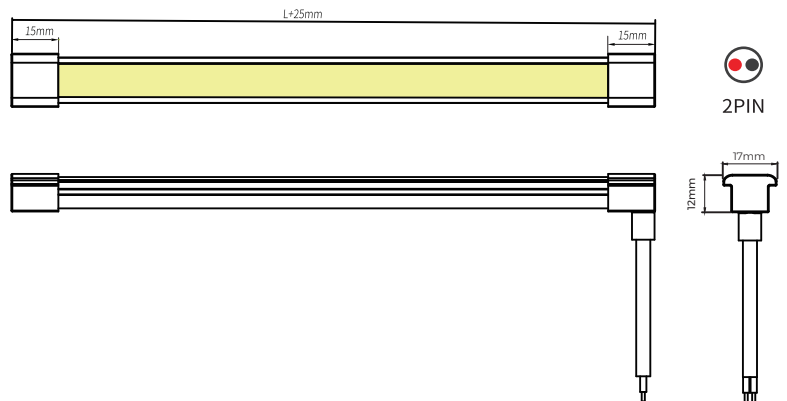


To Specify:

Select Part Number with additional options if required
e.g. **ZENA/R/S/935/3/10m/DIM**

= Zena Recessed, Side bend, 935 lumens per meter, 3000K, 10m, DALI Dimmable

Part No.	CCT	W/m	lm/m	lm/W
ZENA/415	2700	7.2	415	57
ZENA/435	3000	7.2	435	60
ZENA/435	4000	7.2	435	60
ZENA/935	2700	13	935	71
ZENA/965	3000	13	965	74
ZENA/965	4000	13	965	74
ZENA/350	2700	7.2	350	48
ZENA/350	3000	7.2	350	48
ZENA/370	4000	7.2	370	51
ZENA/695	2700	13	695	53
ZENA/740	3000	13	740	56
ZENA/730	4000	13	730	56

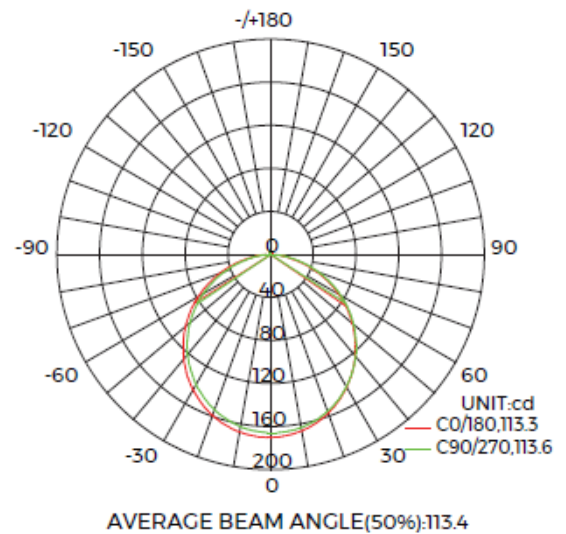

Light distribution

Options

For 2700K suffix
For 3000K suffix
For 4000K suffix

/27
/3
/4

For 5m suffix
For 10m suffix

/5m
/10m

