


# Dominique 140 Surface



- IP20 suitable for internal environments
- Impact rating of IK05
- Efficacy of up to 127lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI 80 as standard, CRI 90 available on request

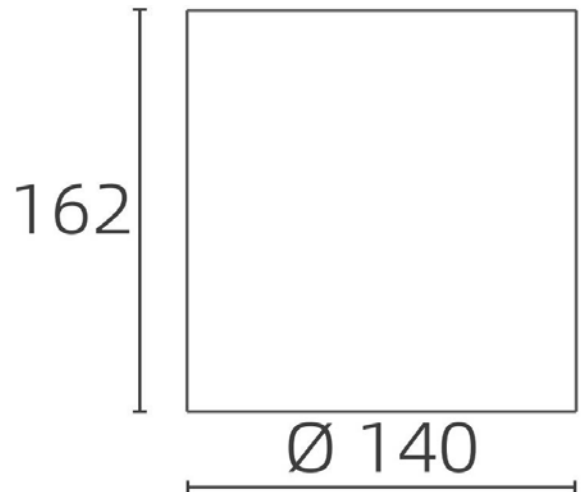

## To Specify:

Select Part Number with additional options if required

e.g. **DOM/140/1357/4/60D/DIM/EMR**

= Dominique Medium, 11W, 1357 lumens, 4000K, 60D, DALI dimmable c/ w 3hr self-contained emergency

| Part No. (3000K)   | Lm   | W  | lm/W |
|--------------------|------|----|------|
| DOM/140/1281/20D/3 | 1281 | 11 | 120  |
| DOM/140/2775/20D/3 | 2775 | 26 | 105  |
| DOM/140/1271/40D/3 | 1271 | 11 | 119  |
| DOM/140/2754/40D/3 | 2754 | 26 | 105  |
| DOM/140/1289/60D/3 | 1289 | 11 | 121  |
| DOM/140/2792/60D/3 | 2792 | 26 | 106  |

| Part No. (4000K)   | Lm   | W  | lm/W |
|--------------------|------|----|------|
| DOM/140/1349/20D/4 | 1349 | 11 | 127  |
| DOM/140/2921/20D/4 | 2921 | 26 | 111  |
| DOM/140/1338/40D/4 | 1338 | 11 | 126  |
| DOM/140/2899/40D/4 | 2899 | 26 | 110  |
| DOM/140/1357/60D/4 | 1357 | 11 | 127  |
| DOM/140/2939/60D/4 | 2939 | 26 | 112  |


## Options

For black finish suffix  
 For white finish suffix  
 For DALI dimmable suffix  
 For 3hr emergency suffix  
 For DALI addressable emergency suffix  
 For self test suffix


/BLK  
 /WHI  
 /DIM  
 /EMR  
 /EMP  
 /ST

# Dominique Surface

20° Optic:

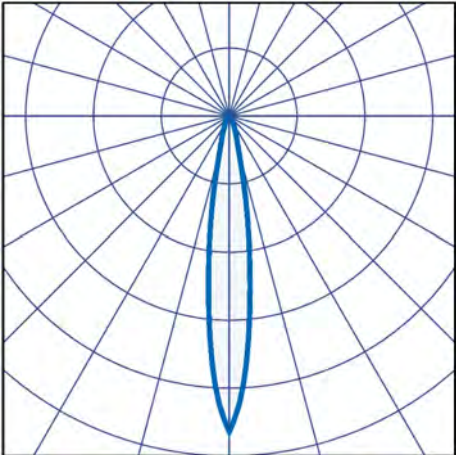

40° Optic:

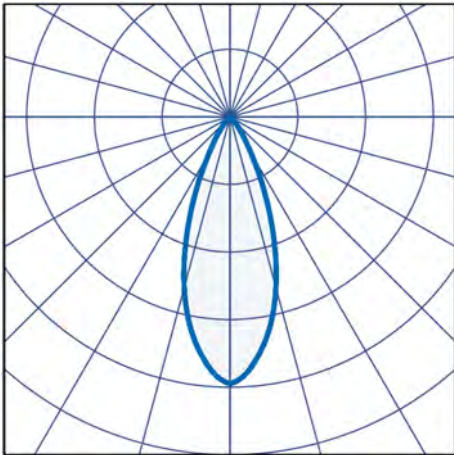

60° Optic:

