


# Eden Elite Trunking



- Efficacies up to 162lm/W
- 100,000 hour life expectancy (L90, B50)
- IP20 suitable for indoor environments
- High colour rendering index CRI > 80
- Colour stability with 3 step MacAdam



## To Specify:

Select Part Number with additional options if required e.g.

### EDEN-ELI/W/11450/4/DIM/ST

= Eden Elite, Wide Lens, 76W, 11450 lumens, 4000K, DALI dimmable  
c/w self-test Emergency


| Part No.            | W   | Lm    | lm/W | CCT   |
|---------------------|-----|-------|------|-------|
| EDEN/E/HR/6750/4    | 42  | 6100  | 145  | 4000K |
| EDEN/ELI/HR/11450/4 | 76  | 10250 | 135  | 4000K |
| EDEN/ELI/HR/18450/4 | 114 | 17400 | 153  | 4000K |
| EDEN/ELI/N/6100/4   | 42  | 6100  | 145  | 4000K |
| EDEN/ELI/N/10400/4  | 76  | 10400 | 137  | 4000K |
| EDEN/ELI/N/17400/4  | 114 | 17400 | 153  | 4000K |
| EDEN/ELI/M/6250/4   | 42  | 6250  | 149  | 4000K |
| EDEN/ELI/M/10500/4  | 76  | 10500 | 138  | 4000K |
| EDEN/ELI/M/18500/4  | 114 | 18500 | 162  | 4000K |
| EDEN/ELI/W/6750/4   | 42  | 6750  | 161  | 4000K |
| EDEN/ELI/W/11450/4  | 76  | 11450 | 151  | 4000K |
| EDEN/ELI/W/18450/4  | 114 | 18450 | 162  | 4000K |

## Options


For DALI dimmable suffix  
For 3hr emergency suffix  
For 3hr self-test emergency suffix  
For 3hr DALI emergency suffix  
For Casambi enabled suffix  
For wireless addressable emergency suffix

/DIM  
/EMR  
/ST  
/EMP  
/CAS  
/WAE


## Mounting

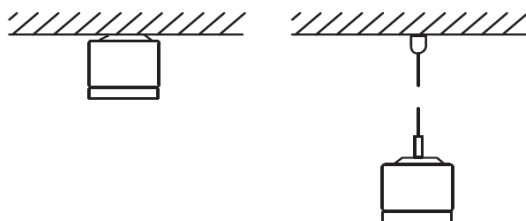


## High-Rack

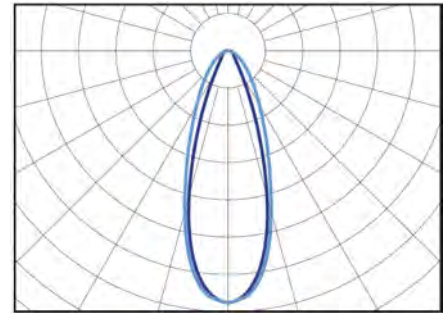

## Narrow

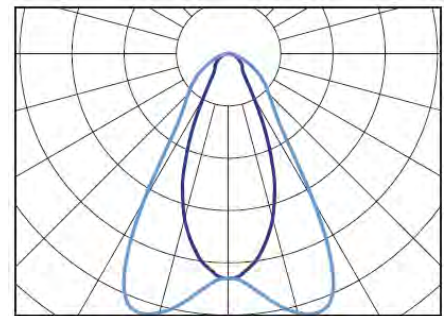

## Medium

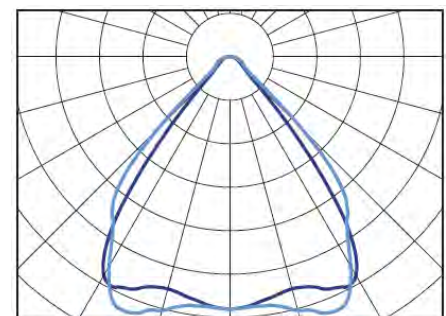

## Wide

