


Eden Mono Trunking



- Efficacies up to 144lm/W
- 100,000 hour life expectancy (L90, B10)
- IP20 suitable for indoor environments
- High colour rendering index CRI > 80
- Colour stability with 3 step MacAdam

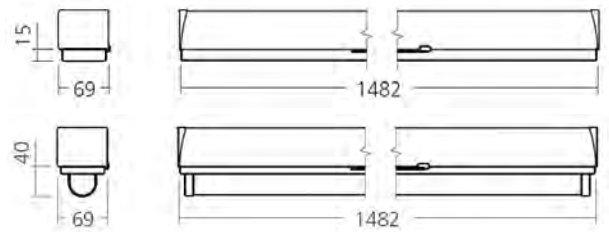




To Specify:

Select Part Number with additional options if required e.g.

EDEN/M/OP/3500/4/DIM/ST

= Eden Mono, Opal Diffuser, 22w, 3500 lumens, 4000K, DALI dimmable c/w self-test Emergency

Part No.	W	Lm	lm/W	CCT
EDEN/M/OP/3500/4	22	3500	159	4000K
EDEN/M/OP/4350/4	28	4350	155	4000K
EDEN/M/OP/5150/4	33	5150	156	4000K
EDEN/M/OP/5900/4	39	5900	151	4000K
EDEN/M/M/2900/4	22	3150	131	4000K
EDEN/M/M/3600/4	27	3900	133	4000K
EDEN/M/M/4250/4	32	4600	132	4000K
EDEN/M/M/4900/4	38	5300	129	4000K
EDEN/M/M/8050/4	60	8050	134	4000K
EDEN/M/W/3200/4	22	3200	145	4000K
EDEN/M/W/4150/4	27	4150	153	4000K
EDEN/M/W/4900/4	32	4900	153	4000K
EDEN/M/W/5600/4	38	5600	147	4000K
EDEN/M/W/9300/4	60	9300	155	4000K

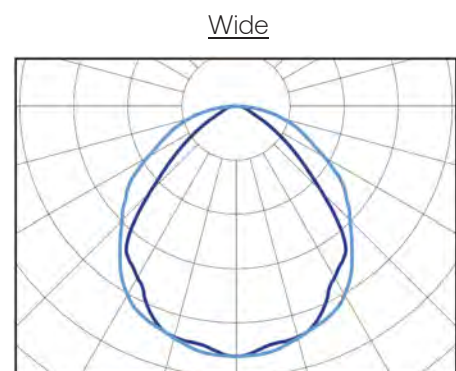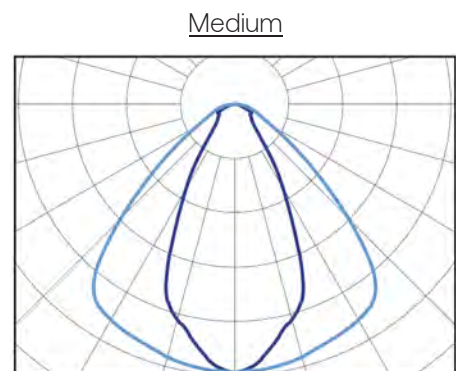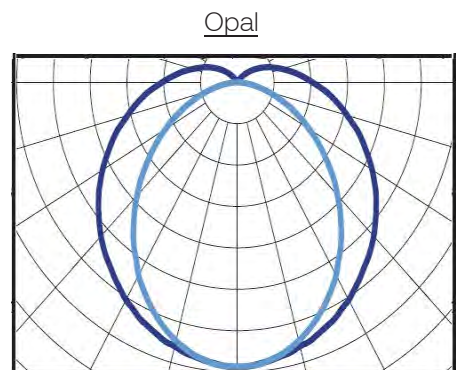

Options

- For DALI dimmable suffix
- For 3hr emergency suffix
- For 3hr self-test emergency suffix
- For 3hr DALI emergency suffix
- For Casambi enabled suffix
- For wireless addressable emergency suffix

/DIM
/EMR
/ST
/EMP
/CAS
/WAE

Mounting

