

Dominique 205 Surface



- IP65 front, IP20 rear suitable for internal environments.
- Impact rating of IK05
- Efficacy of up to 119lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI 80 as standard, CRI 90 available on request


To Specify:

Select Part Number with additional options if required

e.g. **DOM/205/4855/4/60D/DIM/EMR**

= Dominique 205mm Ø, 43W, 4855 lumens, 4000K, 60D, DALI dimmable
c/w 3hr self-contained emergency

Part No. (4000K)	Lm	W	lm/W
DOM/205/3326/60D/4	3326	28	119
DOM/205/4100/60D/4	4100	35	117
DOM/205/4855/60D/4	4855	43	113
DOM/205/5592/60D/4	5592	51	110
DOM/205/6314/60D/4	6314	59	107

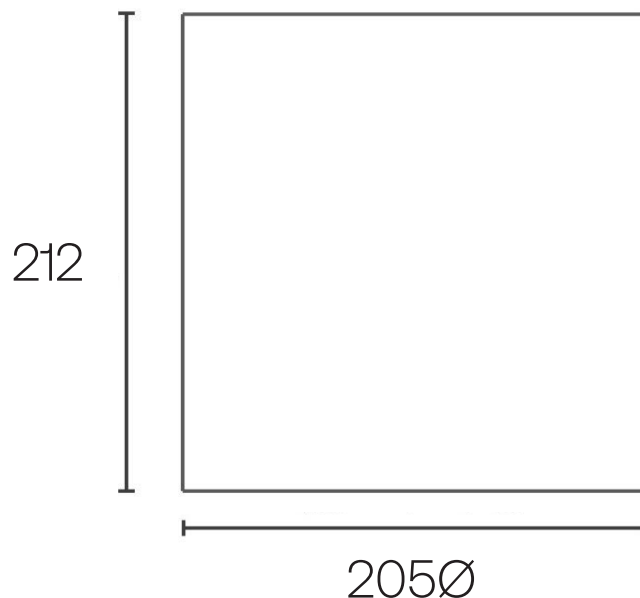

Options

For black finish suffix
For white finish suffix
For DALI dimmable suffix
For wireless dimmable suffix
For 3hr emergency suffix
For DALI addressable emergency suffix
For self test suffix
For wireless addressable emergency suffix

/BLK
/WHI
/DIM
/CAS
/EMR
/EMP
/ST
/WAE

