

# Ravello Downlighter





- Efficacies up to 121lm/W
- Impact rating of IK02
- IP44 suitable for internal environments
- Nominal life-time of 100,000h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI > 80 as standard, CRI > 90 available on request
- Emergency BLF = 313lm

## To Specify:

Select Part Number with additional options if required  
e.g. **RAV/1700/4/OP/DIM/EMP**

= Ravello, 1700 lumens, 15W, 4000K, IP44 opal diffuser, DALI dimmable  
c/w DALI emergency

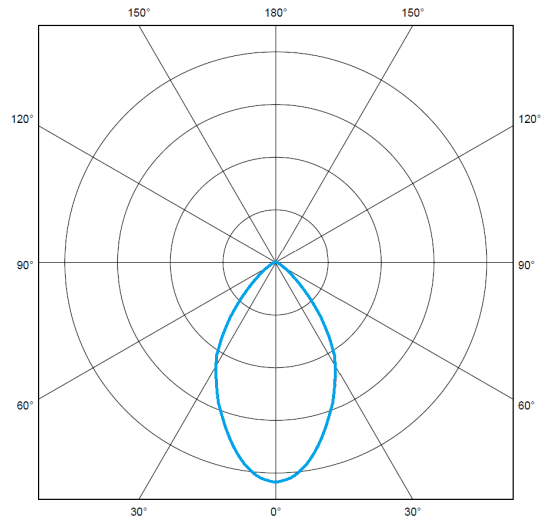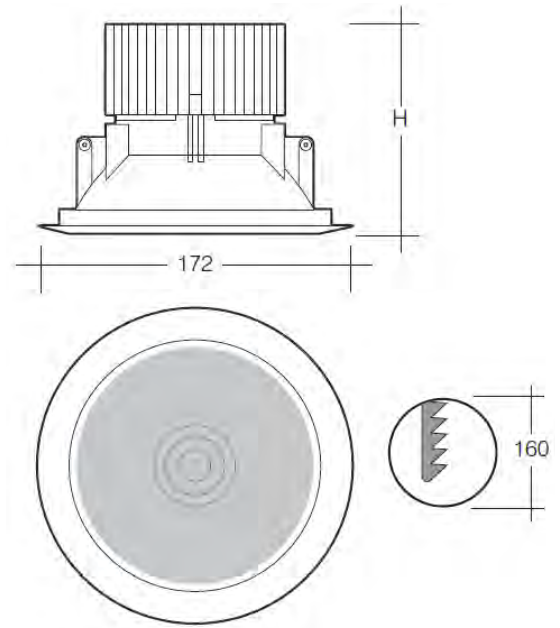

| Part No.          | W  | lm   | lm/W | H(mm) | CCT   |
|-------------------|----|------|------|-------|-------|
| <b>RAV/1070/3</b> | 9  | 1070 | 119  | 80    | 3000K |
| <b>RAV/1090/4</b> | 9  | 1090 | 121  | 80    | 4000K |
| <b>RAV/1660/3</b> | 15 | 1660 | 111  | 80    | 3000K |
| <b>RAV/1700/4</b> | 15 | 1700 | 113  | 80    | 4000K |
| <b>RAV/2400/3</b> | 23 | 2400 | 104  | 115   | 3000K |
| <b>RAV/2460/4</b> | 23 | 2460 | 107  | 115   | 4000K |
| <b>RAV/3410/3</b> | 37 | 3410 | 92   | 115   | 3000K |
| <b>RAV/3500/4</b> | 37 | 3500 | 95   | 115   | 4000K |
| <b>RAV/4020/3</b> | 41 | 4020 | 98   | 145   | 3000K |
| <b>RAV/4130/4</b> | 41 | 4130 | 101  | 145   | 4000K |

## Options

For DALI dimmable suffix

For Casambi enabled suffix

For leading/trailing edge dimmable suffix

For 3hr emergency suffix

For self-test emergency suffix

For DALI addressable emergency suffix

**/DIM**

**/CAS**

**/MDIM**

**/EMR**

**/ST**

**/EMP**