




TR65 LED Emergency Downlight



- IP65 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 118lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Colour stability with 3 step MacAdam
- Black bezel available
- Self Test option available



To Specify:

Select Part Number with additional options if required e.g. **TR65/3/NM/DALI/OA**


= TR65 LED emergency, Non-maintained, DALI addressable c/w, Open Area Optic

Part No.	Lm	W	Cells	Weight	CCT
TR65/2	235	2	1	0.3kg	6500K
TR65/3	343	3	3	0.4kg	6500K
TR65/2Pro	235	2	1	0.3kg	6500K
TR65/3Pro	343	3	3	0.4kg	6500K


Options

For Open Area Optic suffix
For Corridor Area Optic suffix
For Narrow Optic suffix


/OA
/CO
/NA

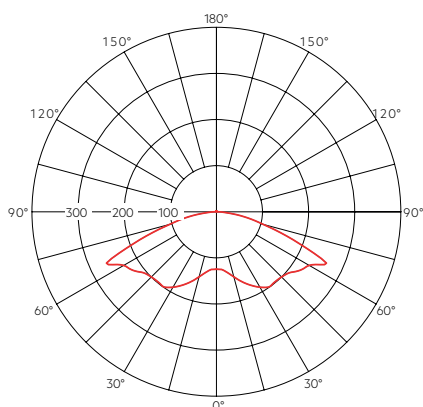

Open area Optic

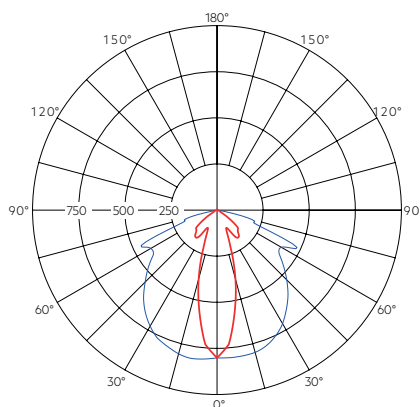

Corridor Optic

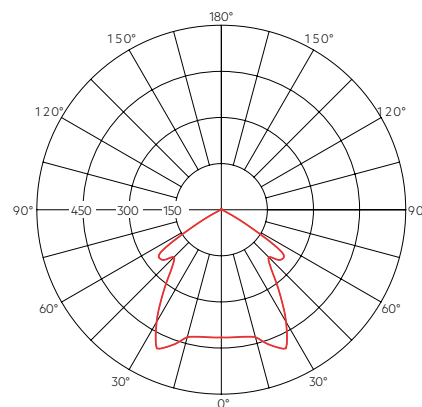

Narrow Optic