

Ellie Downlighter





- Efficacies up to 112lm/W
- Impact rating of IK02
- IP20 suitable for internal environments
- Nominal life-time of 50,000h (L70/B50)
- Colour stability with 4 step MacAdam
- High Colour rendering index CRI > 80
- Emergency BLF = 287lm

To Specify:

Select Part Number with additional options if required

e.g. **ELL/2/2000/4/90**

= Ellie LED 170mm downlighter, 2210lm, 4000k c/w 90deg reflector

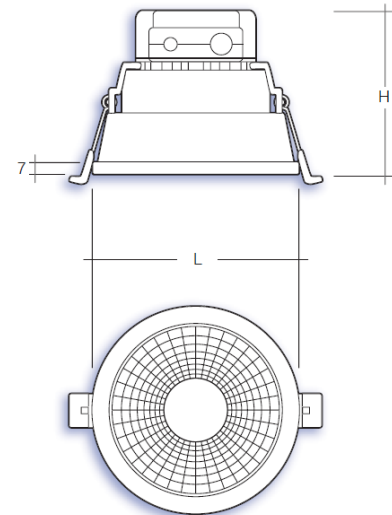

Part No.	W	lm	lm/W	L	H	Ø	CCT
ELL/1/1000/3	10	1060	106	120	96	100	3000K
ELL/1/1000/4	10	1110	111	120	96	100	4000K
ELL/2/1000/3	10	1100	110	170	115	145	3000K
ELL/2/1000/4	10	1120	112	170	115	145	4000K
ELL/2/2000/3	20	2130	106	170	115	145	3000K
ELL/2/2000/4	20	2210	110	170	115	145	4000K
ELL/3/2000/3	20	2200	110	225	135	210	3000K
ELL/3/2000/4	20	2250	112	225	135	210	4000K
ELL/3/3000/3	30	3070	102	225	135	210	3000K
ELL/3/3000/4	30	3180	106	225	135	210	4000K

Options

For 60deg reflector suffix

For 90deg reflector suffix

For Emergency suffix

For DALI dimmable

/60
/90
/EMR
/DIM

