



Exit Exit Sign



- IP20 suitable for internal environments
- Impact rating of IK06
- Efficacy of up to 100lm/W
- Emergency BLF = 150lm
- Battery: 1 x 3.6V 1.5Ah NiCd
- Light source: 16 x 4500K LEDs (CRI 80)
- Weight: 1.1kg
- Viewing distance of 34m
- Nominal lifetime of 100,000 hours (L80,B10)

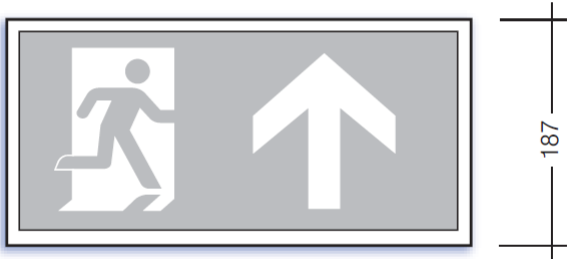

Part No.	Description
EX/LED/NM	Non-maintained Exit Sign supplied with a choice of Exit legends
EX/LED/M	Maintained Exit Sign supplied with a choice of Exit legends
EX/LED/240	240V Exit Sign supplied with a choice of Exit legends
EX/LGD	Exit legend with Arrow Down
EX/LGL	Exit legend with Arrow Left
EX/LGR	Exit legend with Arrow Right
EX/LGU	Exit legend with Arrow Up

Options

For self-test suffix
For EM Pro option suffix

/ST
/EMP

