

Felix Downlighter




- Efficacies up to 180lm/W
- Impact rating of IK04
- IP20 suitable for internal environments
- Nominal life-time of 100,000h (L90/B10)
- Colour stability with 3 step MacAdam
- CRI 80 as standard, CRI 90 available on request
- Emergency BLF = 314lm
- White finish as standard, other finishes available on request

To Specify:

Select Part Number with additional options if required
e.g. **FEL/2871/4/DIM**

= Felix spotlight, 16W, 2871lm, 4000K, DALI dimmable

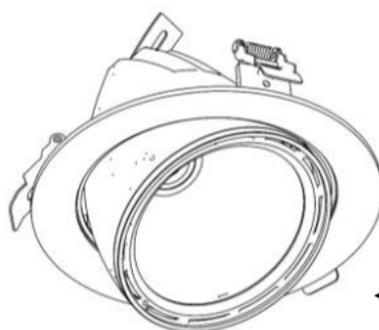

H: 120mm
Ø: 170mm

Part No.	W	lm	lm/W	CCT
FEL/1984/3	11	1984	175	3000K
FEL/2042/4	11	2042	180	4000K
FEL/2789/3	16	2789	169	3000K
FEL/2871/4	16	2871	174	4000K
FEL/3827/3	23	3827	162	3000K
FEL/3939/4	23	3939	167	4000K

Options

For DALI dimmable suffix
For Casambi enabled suffix
For switch dimmable suffix
For 3hr emergency suffix
For 24 degree suffix
For 45 degree suffix

/DIM
/CAS
/SDIM
/EMR
/24
/45