



Garth Anti-Ligature Bulkhead

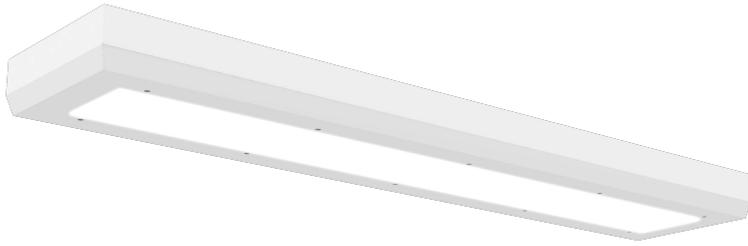

- IP65 rated against dust and water ingress
- Impact rating of IK10
- Efficacy of up to 123lm/W
- Nominal life-time of 100,000h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- 5mm TP(a) diffuser
- 1.5mm steel powder coated

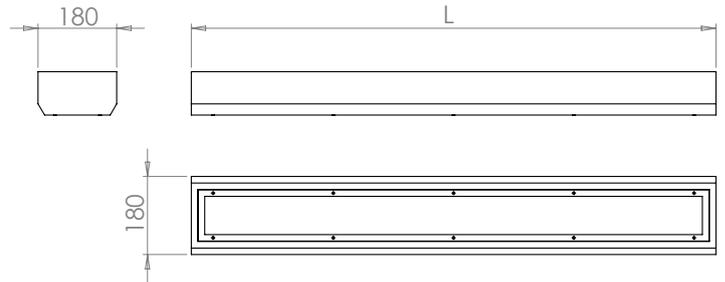


To Specify:

Select Part Number with additional options if required

e.g. **GAR/15/4350/4/DIM**

= Garth, 1500mm, 4350 Lumens, 4000K, DALI dimmable

Part No.	W	lm	lm/W	L(mm)
GAR/12/3480/4	21	3480	165	4000K
GAR/12/5800/4	35	5800	165	4000K
GAR/12/8080/4	51	8080	158	4000K
GAR/15/4350/4	25	4350	174	4000K
GAR/15/7250/4	44	7250	164	4000K
GAR/15/10100/4	63	10100	160	4000K

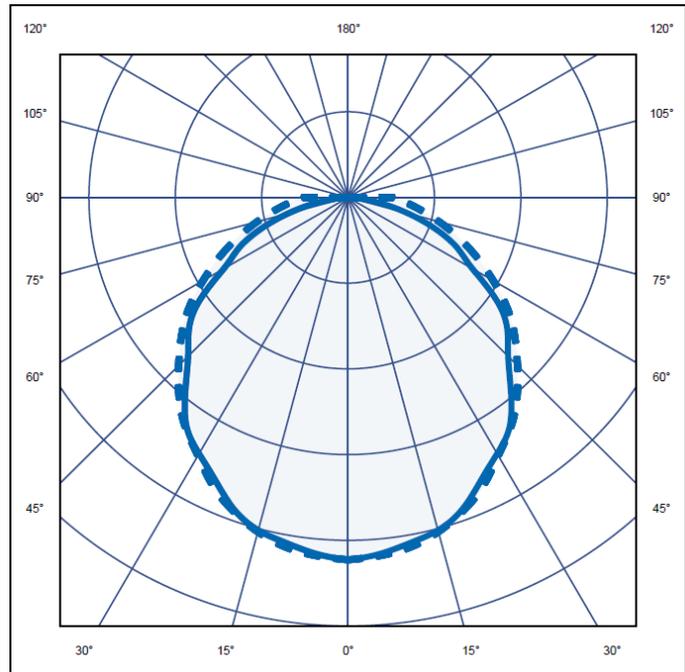

Options

For 3 hour Maintained Emergency option suffix

For DALI Dimmable suffix

For 3hr Self-test emergency suffix

For DALI 3hr emergency suffix

For White suffix

For Black suffix

For Microprismatic

For Opal

For Surface/Suspended suffix

For Recessed

/EMR

/DIM

/ST

/EMP

/W

/B

/MP

/OP

/S

/R