

# Henry MSU Downlighter



- MSU certified
- Efficacies up to 126lm/W
- Impact rating of IK10
- IP44 suitable for internal environments
- Nominal life-time of 50,000h (L90/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 315lm


## To Specify:

Select Part Number with additional options if required

e.g. **HEN/MSU/2200/4/DIM/EMR**

= Henry MSU, 2270 lumens, 18W, 4000K, DALI dimmable c/w 3hr emergency

| Part No.              | W  | lm   | lm/W | H(mm) | CCT   |
|-----------------------|----|------|------|-------|-------|
| <b>HEN/MSU/1000/3</b> | 10 | 1026 | 102  | 110   | 3000K |
| <b>HEN/MSU/1000/4</b> | 10 | 1061 | 106  | 110   | 4000K |
| <b>HEN/MSU/1400/3</b> | 13 | 1412 | 108  | 110   | 3000K |
| <b>HEN/MSU/1400/4</b> | 13 | 1463 | 112  | 110   | 4000K |
| <b>HEN/MSU/2200/3</b> | 18 | 2183 | 121  | 125   | 3000K |
| <b>HEN/MSU/2200/4</b> | 18 | 2270 | 126  | 125   | 4000K |
| <b>HEN/MSU/2600/3</b> | 22 | 2541 | 115  | 125   | 3000K |
| <b>HEN/MSU/2600/4</b> | 22 | 2678 | 121  | 125   | 4000K |
| <b>HEN/MSU/3000/3</b> | 27 | 2996 | 110  | 125   | 3000K |
| <b>HEN/MSU/3000/4</b> | 27 | 3105 | 115  | 125   | 4000K |

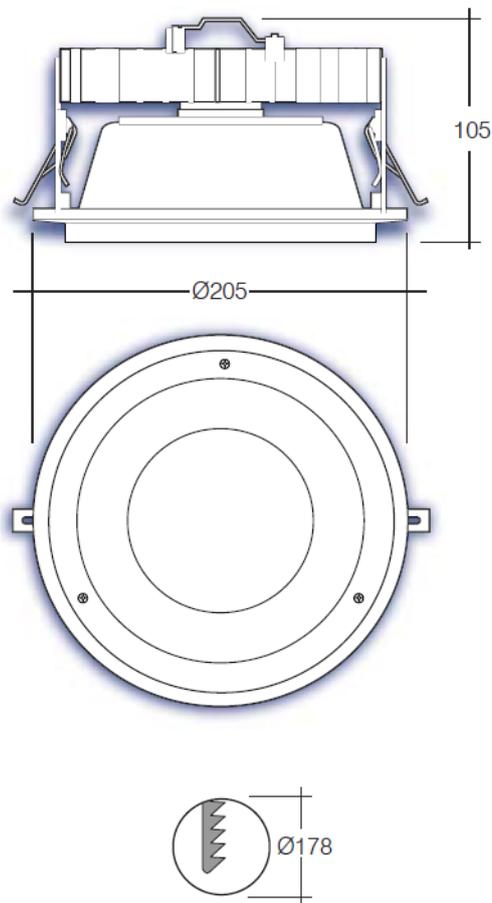

## Options

For DALI dimmable suffix

**/DIM**

For Casambi enabled suffix

**/CAS**

For tunable white suffix

**/TW**

For 3hr emergency suffix

**/EMR**

For self-test emergency suffix

**/ST**

For DALI addressable emergency suffix

**/EMP**

For wireless addressable emergency suffix

**/WAE**