


# Imogen System - Suspended

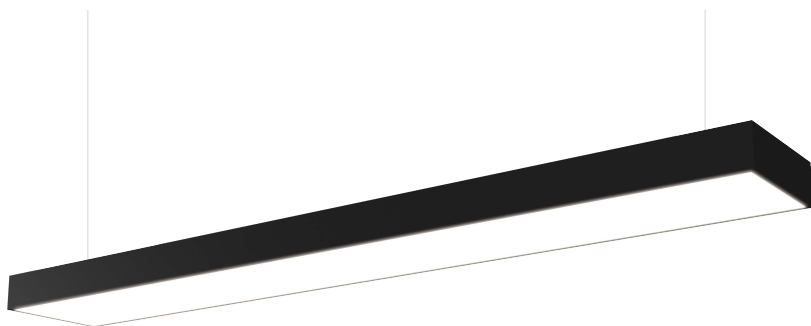

- IP40 suitable for indoor environments
- Impact rating of IK08
- Efficacy of up to 141lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 445lm
- High colour rendering index CRI > 80


## To Specify:

Select Part Number with additional options if required

e.g. **IM/14/5496/4/S/B/DIM/EMP**

= Imogen 1450mm, Suspended Black Luminaire, 5496lm, 42w, 4000K, DALI Dimmable c/w DALI EM-PRO 3hr emergency

| Part No.            | W  | lm   | lm/W | L(mm) |
|---------------------|----|------|------|-------|
| <b>IM/11/1997/4</b> | 14 | 1997 | 141  | 1170  |
| <b>IM/11/2645/4</b> | 19 | 2645 | 139  | 1170  |
| <b>IM/11/3255/4</b> | 24 | 3255 | 135  | 1170  |
| <b>IM/14/3225/4</b> | 23 | 3225 | 135  | 1450  |
| <b>IM/14/4347/4</b> | 33 | 4347 | 131  | 1450  |
| <b>IM/14/5496/4</b> | 42 | 5496 | 129  | 1450  |

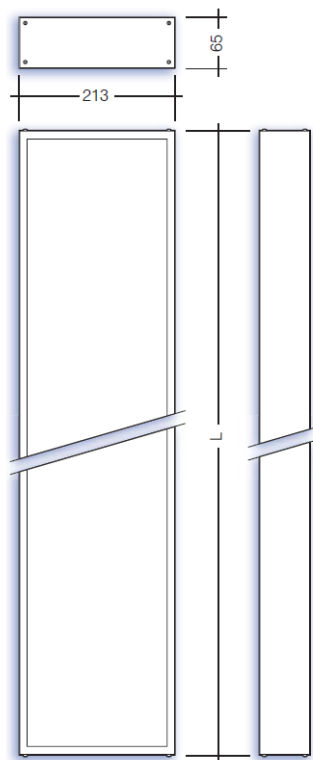

## Options

For microprismatic suffix  
 For opal suffix  
 For Surface/Suspended suffix  
 For Recessed suffix  
 For Black suffix  
 For White suffix  
 For DALI Dimable suffix  
 For Self-Contained 3hr emergency suffix  
 For 3hr Self-test emergency suffix  
 For DALI EM-PRO 3hr emergency

/MP  
 /OP  
 /S  
 /R  
 /B  
 /W  
 /DIM  
 /EMR  
 /ST  
 /EMP

## Options

For 2m wire suspension

/IM/WIRE/2M

