

LD Series Outdoor Surface




LD7010

LD7016



- IP65 suitable for external/wet environments
- Impact rating of IK10
- Efficacy of up to 121lm/W
- Nominal life-time of 80,000h (L80/B10)
- High colour rendering index CRI > 80
- Emergency BLF = 312lm
- Colour stability with 3 step MacAdam

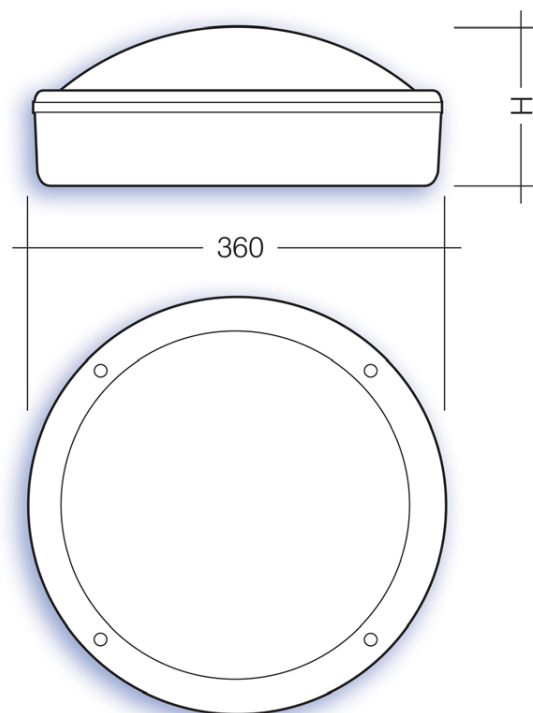

To Specify:

Select Part Number with additional options if required

e.g. **LD7016/1216/4/BLK/F3/ST**

= Black Eyelid bulkhead, 1216lm, 10W, 4000K, Corridor Function without daylight control c/w Self-test Emergency

Part No.	W	lm	lm/W	Height
LD7010/940/4	10	935	95	145
LD7010/1230/4	13	1227	96	145
LD7010/1480/4	16	1480	95	145
LD7016/1216/4	10	1216	121	169
LD7016/1542/4	14	1542	110	169
LD7016/2080/4	20	2078	104	169

Options

For 3 hour Maintained Emergency option suffix

For DALI Dimmable suffix

For 3hr Self-test emergency suffix

For DALI 3hr emergency suffix

For silver bezel suffix

For white bezel suffix

For black bezel suffix

For 3000K suffix

/EMR

/DIM

/ST

/EMP

/SLV

/WHI

/BLK

/3

Sensor Options

On-off, no daylight control suffix

On-off, with daylight control suffix

Corridor function, no daylight control suffix

Corridor function, with daylight control suffix

Dimm to off, no daylight control suffix

Dimm to off, with daylight control suffix

/F1

/F2

/F3

/F4

/F5

/F6