


LED3 Emergency Downlight

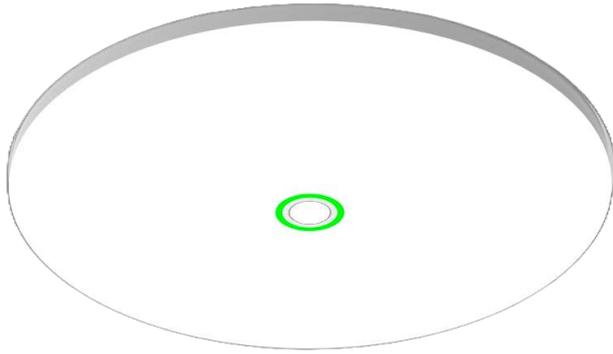

To Specify:



Select Part Number with additional options if required

e.g. **LED3/CIR/WHI/OA/ST**

= LED3 Circular White Bulkhead, Open Area optic c/w 3hr Monitor Self-test Emergency

Open Area Spacing Table

Mounting Height	To Wall		Between Fittings	
	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
2.5m	5.2m	4.2m	12.1m	10.3m
3.0m	5.6m	4.4m	13.5m	11.2m
4.0m	6.2m	-	15.4m	12.4m
5.0m	-	-	16.9m	-
6.0m	-	-	17.7m	-

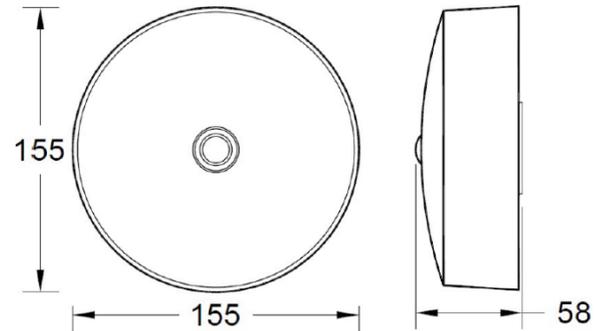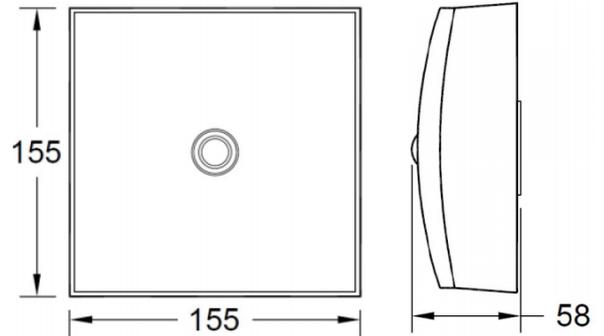


- Suitable for ceiling recess applications
- Plugs and Leads for Simple Installation
- Strain Relief Module
- Can be Supplied without LED Where Required
- Suitable for 40mm or Greater Aperture
- Features Extra Long Life LiFePO4 Batteries
- Weight = 0.42kg / Dali = 0.44kg
- IP20 suitable for internal environments
- CCT 4000K

Options


- For white (Ral 9016) finish suffix
- For black (Ral 9005) finish suffix
- For open Area optic suffix
- For spot optic suffix
- For corridor optic suffix
- For side cable entry suffix
- For remote battery suffix

/WHI
/BLK
/OA
/ST
/COR
/EMP
/REM

Corridor

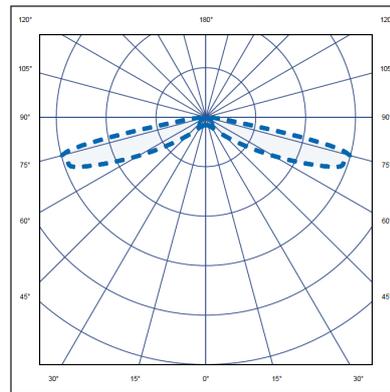

Open Area

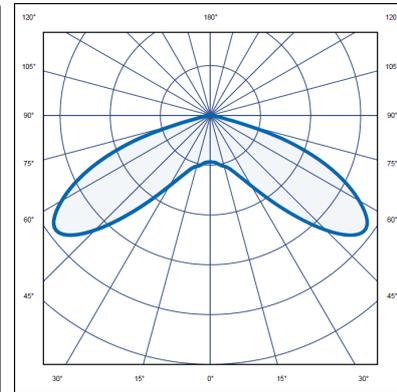

Along Corridor (length)

Mounting Height	To Wall		Between Fittings		Along Corridor (width)		To Wall	
	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
2.5m	9.9m	8.1m	22.3m	19.7m	7.9m	6.3m	3.1m	2.4m
3.0m	10.7m	8.4m	25.4m	21.5m	8.4m	6.6m	3.3m	2.4m
4.0m	11.8m	0.4m	29.5m	23.5m	9.2m	6.8m	3.4m	0.2m
5.0m	11.5m	-	32.2m	22.9m	9.6m	6.2m	3.1m	-
6.0m	-	-	33.5m	-	9.6m	-	-	-

Along Corridor (width)