


Lily 1 Downlighter



- Efficacies up to 141lm/W
- Impact rating of IK04
- IP20 suitable for internal environments
- Nominal life-time of 54,000h (L70/B50)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 90
- Emergency BLF = 352lm

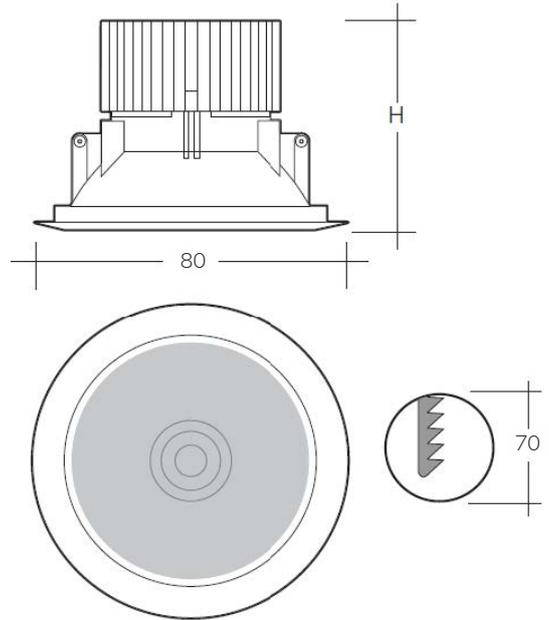

To Specify:

Select Part Number with additional options if required
e.g. **LIL/1/DC10/4/WHI/36D/DIM**

= Lily 1 Fixed Downlight, 1130lm, 10w, 4000K, White, 36°, DALI Dimmable

Part No.	W	lm	lm/W	H(mm)	CCT
LIL/1/AC10/2	9	800	88	80	2700K
LIL/1/AC10/3	9	830	92	80	3000K
LIL/1/AC10/4	9	865	96	80	4000K
LIL/1/DC10/2	8	1060	132	65	2700K
LIL/1/DC10/3	8	1100	137	65	3000K
LIL/1/DC10/4	8	1130	141	65	4000K
LIL/1/DC12/2	12	1370	114	75	2700K
LIL/1/DC12/3	12	1500	125	75	3000K
LIL/1/DC12/4	12	1535	127	75	4000K

Options

For White bezel option suffix	/WHI
For Chrome bezel option suffix	/CH
For Satin Silver bezel option suffix	/SS
For 12° suffix	/12
For 24° suffix	/24
For 36° suffix	/36
For Dali dimmable option (DC only) suffix	/DIM
For 3hr integral emergency	/EMR