

Lily 2 Downlighter



- Efficacies up to 141lm/W
- Impact rating of IK04
- IP20 suitable for internal environments
- Nominal life-time of 54,000h (L70/B50)
- Colour stability with 3 step MacAdam
- Very high colour rendering index CRI > 90
- Emergency BLF = 352lm


To Specify:

Select Part Number with additional options if required

e.g. **LIL/2/DC10/4/WHI/36D/DIM**

= Lily 2 Adjustable Downlight, 1130lm, 10w, 4000K, White, 36°, DALI Dimmable

Part No.	W	lm	lm/W	H(mm)	CCT
LIL/2/AC10/2	9	800	88	80	2700K
LIL/2/AC10/3	9	830	92	80	3000K
LIL/2/AC10/4	9	865	96	80	4000K
LIL/2/DC10/2	8	1060	132	65	2700K
LIL/2/DC10/3	8	1100	137	65	3000K
LIL/2/DC10/4	8	1130	141	65	4000K
LIL/2/DC12/2	12	1370	114	75	2700K
LIL/2/DC12/3	12	1500	125	75	3000K
LIL/2/DC12/4	12	1535	127	75	4000K

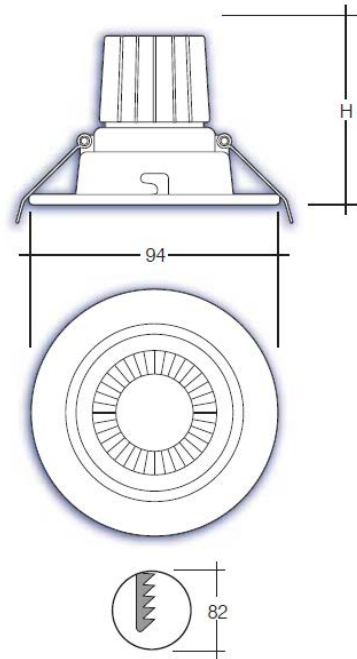

Options

For White bezel option suffix

/WHI

For Chrome bezel option suffix

/CH

For Satin Silver bezel option suffix

/SS

For 12° suffix

/12

For 24° suffix

/24

For 36° suffix

/36

For Dali dimmable option (DC only) suffix

/DIM

For 3hr integral emergency

/EMR