


Luna Outdoor Surface



- IP65 suitable for external environments
- Impact rating of IK08
- Efficacy of up to 124lm/W
- Nominal life-time of 102,000h (L90/B10)
- Emergency BLF = 276lm

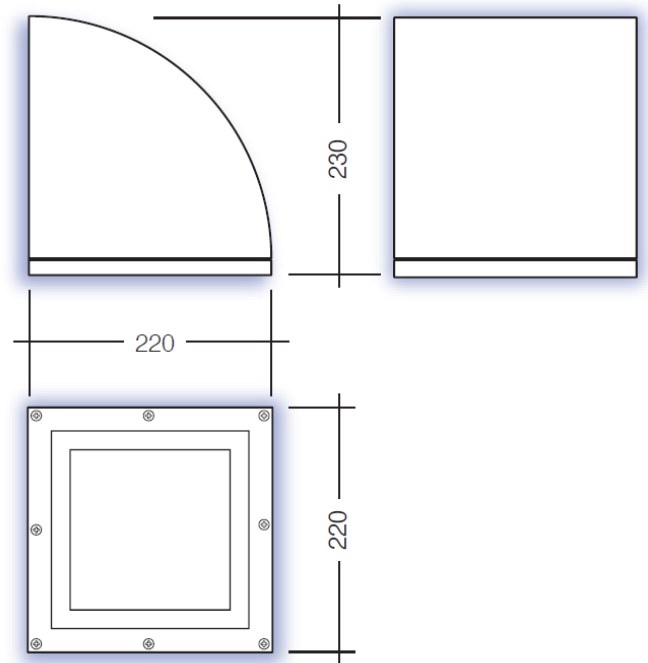

To Specify:


Select Part Number with additional options if required

e.g. **Luna/L6/2000/74**

= Luna, L6 Wide lens, 2199lm, 4000K


L4 Flood Lens

Part No.	W	lm	lm/W
LUN/L4/1300/74	13	1307	94
LUN/L4/2000/74	18	2199	122
LUN/L4/3000/74	26	3120	120
LUN/L4/4000/74	36	4101	114



L6 Wide Pathway

Part No.	W	lm	lm/W
LUN/L6/1200/74	13	1205	87
LUN/L6/2000/74	18	2199	122
LUN/L6/3000/74	26	3120	120
LUN/L6/4000/74	35	4101	117



Options

For 3 hour Maintained Emergency option suffix

For DALI Dimmable suffix

For 3hr Self-test emergency suffix

For DALI 3hr emergency suffix

For graphite finish suffix

For silver finish suffix

/EMR

/DIM

/ST

/EMP

/GRA

/SLV